ALPINE SERVICE MANUAL

4/3/2 Channel Power Amplifier

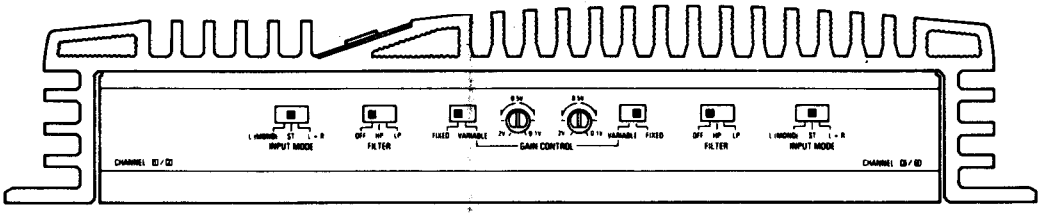

3554

Contents

Specifications 2
Features 3
Switches and Terminals 4
Switch Settings 5
Characteristic Curves 6
Connections 7
Precautions 8
Disassembly Instructions 9
Block Diagram ..... 10 to 11
Parts Layout on P.C.Boards and Wiring Diagram ..... 12 to 14
Schematic Diagram ..... 15 to 17
IC's and Transistors Voltage Values 18
Exploded View (Cabinet) ..... 19 to 20
Cabinet Assembly Parts List 21
Electrical Parts List ..... 22 to 25
Packing Method View 26
Packing Assembly Parts List 26
Semi-Conductor Lead Identifications ..... 27 to 29

Specifications

Power Source	14.4VDC (11 ~ 16V)
Current Drain (No signal)	3.5A
Power Output (1 kHz, 0.8% THD)	145W/4ch
Input Sensitivity	Fixed: 0.5V± 2 dB Variable: 2V± 2 dB
Frequency Response (-1 dB)	20 Hz – 40 kHz
Signal to Noise Ratio	100 dB
Separation	56 dB
Input Impedance	10 kohm ± 2 kohm
Output Impedance	4 ohm
Output Noise	1 mV
Semiconductors	13 IC's, 51 Transistors, 29 Diodes, 6 Zener Diodes, 2 LED's
Dimensions	285(W)× 55(H) × 300(D) mm
Weight	4.15 kg

NOTE: Due to continuing product improvement, specifications and design are subject to change without notice.

Features

- **4/3/2-Channel Operation:**
  The 3554 can be used in 3 ways as:

a. 4-channel full-range amplifier, producing 50W per channel into 4 ohms, or 75W per channel into 2 ohms. The amplifier can be used in a 4-speaker full range system or in a bi-amped, dual subwoofer and dual satellite combination.

b. 3-channel amplifier, producing 50W (4 ohms) or 75W (2 ohms) into channels 1 & 2, and 150W (4 ohms) into the third channel. This combination is perfect for a single subwoofer, dual satellite (right and left) system.

c. 2-channel full-range amplifier, producing 150W per channel into 4 ohms. The amplifier can be used as full range, low-pass (sub-woofer amp), or high-pass (satellite amp).

- **Status Monitor:**
  This indicator illuminates in green when the 3554 is on and operational. This light will turn orange if any protection circuitry is activated. It can be used as a troubleshooting aide should an installation problem develop.

- **Active Dividing Network:**
  A built-in, switchable electronic crossover network at 80 Hz, 18 dB per octave can be used to set up the amplifier for low-pass (subwoofer) or high-pass (tweeter/midrange satellite) applications. This network can also be switched off to allow full-range signal amplification.

- **Duo-β Feedback Circuitry:**
  Duo-Beta is a patented and technologically advanced form of negative feedback. Negative feedback is used to minimize distortion and stabilize the amplifier. Too much feedback, however, increases the transient intermodulation distortion (T.I.M.), decreases the amplifier slew factor, and reduces its musicality. The Duo-Beta circuitry supplies low negative feedback throughout the audio frequency and very high negative feed-back at DC. This stabilizes the amplifier, removes DC offset, and offers excellent total harmonic distortion (T.H.D.) characteristics. It also provides low T.I.M., with excellent slew factor, stability, and musicality.

- **No Current Limiting:**
  Current limiting circuitries used in conventional amplifiers may cause premature clipping and inferior transient response. Absence of current limiters in the audio section ensures low T.I.M., excellent transient response, and superb sonic quality.

- **S.T.A.R. Circuitry:**
  Alpine proprietary Signal Transit for Accurate Response circuit topology improves sonic properties by reducing interaction between different sections of the circuitry.

- **Input Mode Selector:**
  This switch allows the user to specify the input signal entering the amplifier:

a. **Stereo Mode:**
Allows the right and left channel signals to reach their designated amplifier channels. This mode provides a stereo output or a center channel common information output (when used in the bridged configuration).

b. **L (MONO) Mode:**
Disables the right channel input connector and routes the signal through the left channel input to all sections of the amplifier. This mode can be used when a single (mono) signal is amplified (either in stereo or bridged operation).

c. **L+R Mode:**
Sums the right and left channel input signals and routes the result to all sections of the amplifier. It can be used in stereo or bridged operation to provide a summed (mono) output.

- **DC-to-DC Switching Mode Power Supply:**
  Provides excellent power output throughout the audio bandwidth (20 Hz to 20 kHz). Its soft clipping characteristics ensure superb transient response and musicality.

- **Fully Complementary, Discrete Output Circuitry:**
  For excellent reliability, superb sonic performance and high current capability for accurate transient response.

- **Continuously Adjustable, Independent Front and Rear Input Gain Controls:**
  Allow different level settings for the two different audio sections.

- **Heavy Duty Construction:**
  Glass-epoxy printed circuit boards for excellent thermal stability and long-term reliability.

- **Gold-Plated RCA Input Connectors:**
  For most accurate signal transmission and lowest possible loss. Gold-plated terminals are immune to signal deterioration caused by corrosion in the connectors that can develop over time.

- **Gold-Plated Speaker Output and Power Connectors:**
  For high definition, minimum loss power transfer and oxidization resistance.

- **High Performance, Low Noise, Audiophile Quality Active and Passive Components.**

- **Capacitive/Inductive Power Supply Input and Output Filtering:**
  For low radio frequency interference (RFI) and immunity to system noises (such as alternator whine).

- **Fully Protected Against Wiring Errors.**

Switches And Terminals

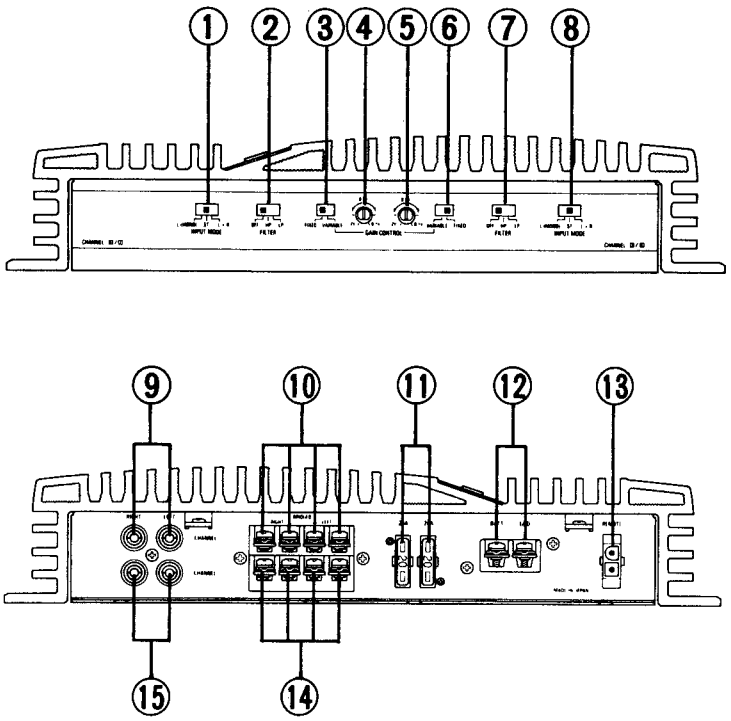

① Input Mode Selector Switch (Channels 1/2)
② Active Dividing Network Mode Selector Switch (Channels 1/2)
③ Input Gain Selector Switch (Channels 1/2)
④ Input Gain Adjustment Control (Channels 1/2)
⑤ Input Gain Adjustment Control (Channels 3/4)
⑥ Input Gain Selector Switch (Channels 3/4)
⑦ Active Dividing Network Mode Selector Switch (Channels 3/4)
⑧ Input Mode Selector Switch (Channels 3/4)
⑨ Input RCA Jacks (Channels 1/2)
⑩ Speaker Output Terminals (Channels 1/2)
⑪ Fuse Blocks
⑫ Power Terminals
⑬ Remote On Connector
⑭ Speaker Output Terminals (Channels 3/4)
⑮ Input RCA Jacks (Channels 3/4)
⑯ Status Monitor

Switch Settings

Input Mode Selector Switches ① and ⑧:

a) Set to the "ST" position (center) when the amplifier is used as a 4-channel stereo system.



b) Set to the "L (MONO)" position when the amplifier is used for one channel of a stereo or bridged system.



c) Set to the "L+R" position when the amplifier is used for the subwoofer system which uses the right channel and left channel signals summed.



Active Dividing Network Selector Switches ② and ⑦

a) Set to the "LP" position when the amplifier is used for the low-pass (sub-woofer) system. The frequencies higher than 80 Hz will be cut (at a rate of 18 dB per octave).



b) Set to the "HP" position when the 3554 is used for the high-pass (tweeter/midrange and subwoofer) system. The frequencies lower than 80 Hz will be cut (at a rate of 18 dB per octave).



c) Set to the "OFF" position when the 3554 is used for the regular stereo system with full-range speakers. The full bandwidth will be output without cutting the high or low frequencies.



Fixed/Variable Input Selector Switches ③ and ⑥:

a) Set to the "FIXED" position when connecting the 3554 to other Alpine products. This position sets the input sensitivity to 500 mV which corresponds to the pre-amp output of Alpine products.



b) Set to the "VARIABLE" position when connecting the 3554 to a non-Alpine product with an output voltage other than 500 mV. This position should also be used when adjustment of input sensitivity is required to obtain certain imaging requirements or to compensate for different speaker efficiencies.



Input Gain Controls ④ and ⑤:

After setting the Input Select Switches ③ and ⑥ to the "VARIABLE" position, rotate the Input Gain Controls 4 and 5 with a #0 screwdriver and adjust the input gain to the point where there is maximum volume with no distortion.

Status Monitor:

This indicator lights green when the power is on. The 3554 has built-in protection circuitry. If, for some reason, this protection circuit is activated, the indicator turns orange. If this happens, turn the system off, find the cause of the problem and remedy the situation. This includes checking all your connections and wiring. If the indicator remains orange when the system is turned on, consult your authorized Alpine dealer.

Note: The indicator will illuminate in orange for a few seconds when the power is turned on as the protection circuit will be activated. This is normal.

Characteristic Curves

POWER VS. DISTORTION CURVE

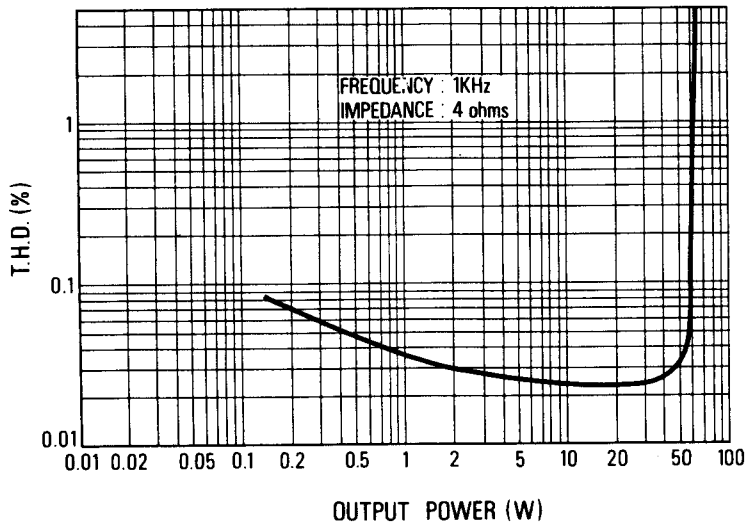

FREQUENCY RESPONSE CURVE

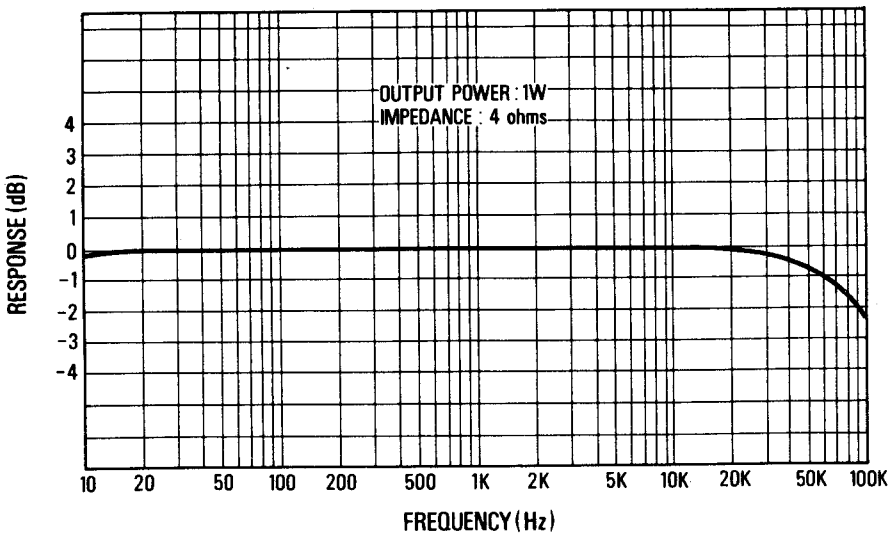

Connections

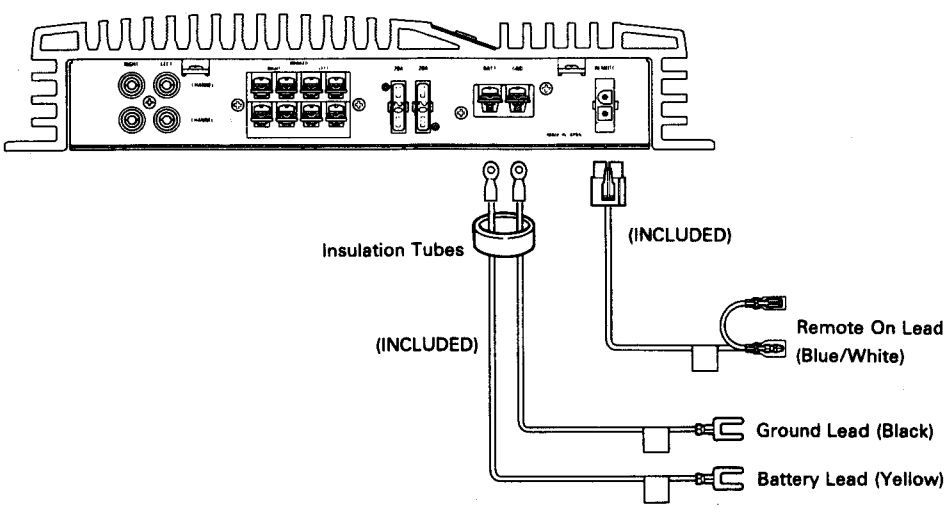

Before making connections, be sure to turn the power off to all audio components. Insulation tubes for the speaker leads and the power supply leads are supplied with the 3554, route the speaker leads and the power supply leads separately through these tubes.

1. Speaker Output Terminal
The 3554 has two sets of speaker outputs for the Front and Rear speakers. Be sure to observe correct speaker output connections and phasing. In the stereo mode connect the right speaker output to the right speaker, and the left to left. Connect the positive output to the positive speaker terminal,and the negative to negative. In the bridged mode, connect the left positive to the positive terminal on the speaker, and the right negative to the negative terminal of the speaker. Do not use the speaker (-) terminal commonly for the right and left speakers or connect it to the vehicle's chassis ground.

Note: Do not connect speaker leads together or to chassis ground.

2. Ground Lead (Black)
Connect this lead securely to a clean, bare metal spot on the vehicle's chassis. Verify this point to be a true ground by checking for continuity between that point and the negative (-) terminal of the vehicle's battery.

3. Battery Lead (Yellow)
Connect this lead directly to the positive (+) terminal of the vehicle's battery.

Do not connect this lead to the vehicle's electrical system.

4. Remote Turn-On Lead (Blue/White)
Connect this lead to the remote turn on lead of your head unit.

5. Input RCA Jacks
Connect these jacks to the line out leads on your head unit using optional RCA extension patch cords. Be sure to observe correct channel connections; Left to Left, Right to Right, Front to Front, and Rear to Rear.

Three simple and typical system combinations are illustrated. For wiring connections, carefully follow the instructions provided with each component.

Precautions

1. Improper wiring connections could cause damage to your vehicle's electrical system and/or the 3554 amplifier. Carefully follow the wiring instructions in this manual.

2. Attaching the battery lead to the positive (+) terminal of the battery should be the last connection after all other connections are made.

3. Due to the high power output of the 3554, it is important that all connections are clean and well secured, or damage could result.

4. Be sure that the 3554 is mounted in a way that will allow for free air circulation and heat dissipation.

5. When changing fuses, be sure to replace the old fuse with one of the same amperage. Use of improper fuses can lead to serious damage to components.

Disassembly Instructions

1. Removal of Bottom Cover.

(1) Remove four screws marked " ○ " as shown in Figure 1.

(2) The Bottom Cover will be removed by pulling out in the arrow direction as shown in Figure 1.

2. Removal of Amp P.C.Board.

(1) After removal of the Bottom Cover, remove 31 screws marked " ● ". Then, the Amp P.C.Board will be removed from heat tank together with Rear Chassis and RCA, Output Connector and Power P.C.Board as shown in Figure 2.

(2) Remove two screws marked " ■ " and the solders located two placed as shown in Figure 3.

(3) After removal of two pieces of fuse, remove seven screws marked " ▲ " and the hooks located at six places as shown in Figure 4.

(4) After the above procedures are completed, RCA, Output Connector and Power P.C.Board is ready to be removed from Rear Chassis together with the Main P.C.Board.

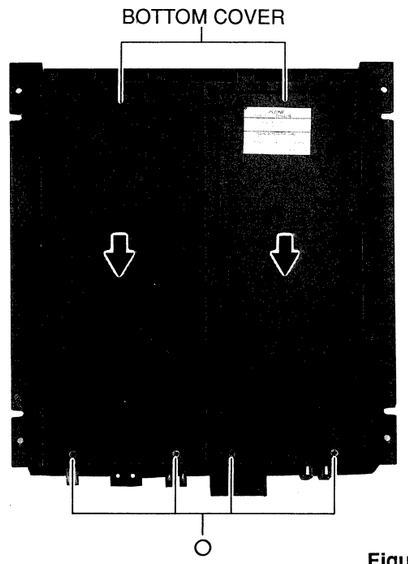

Figure 1

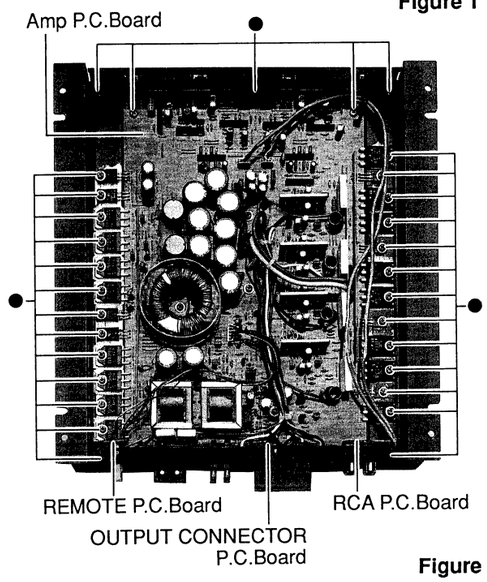

Figure 2

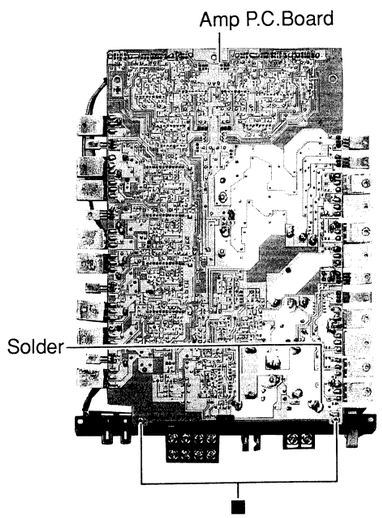

Figure 3

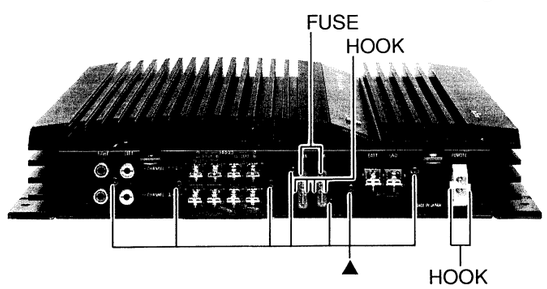

Figure 4

Block Diagram

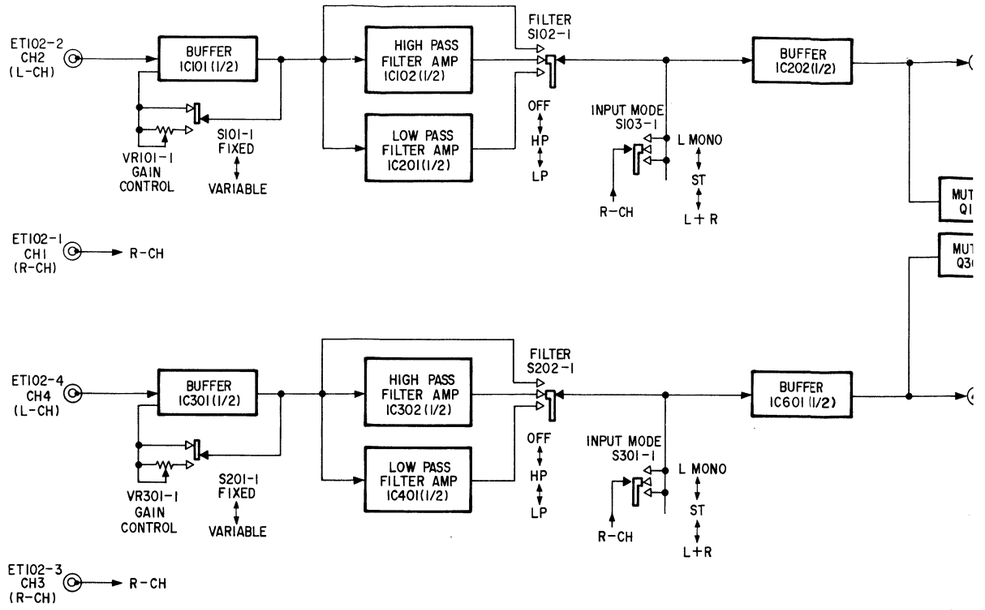

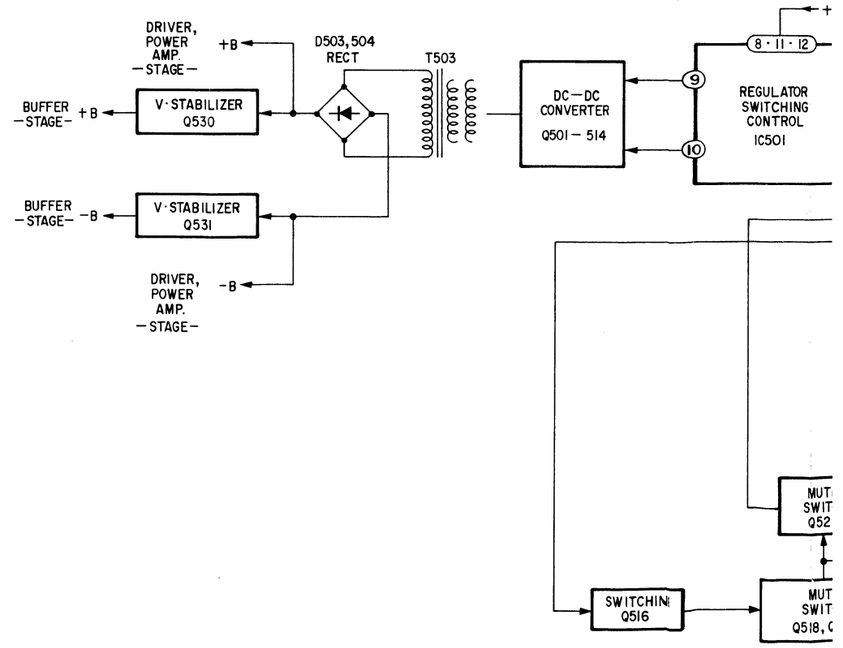

Block Diagram

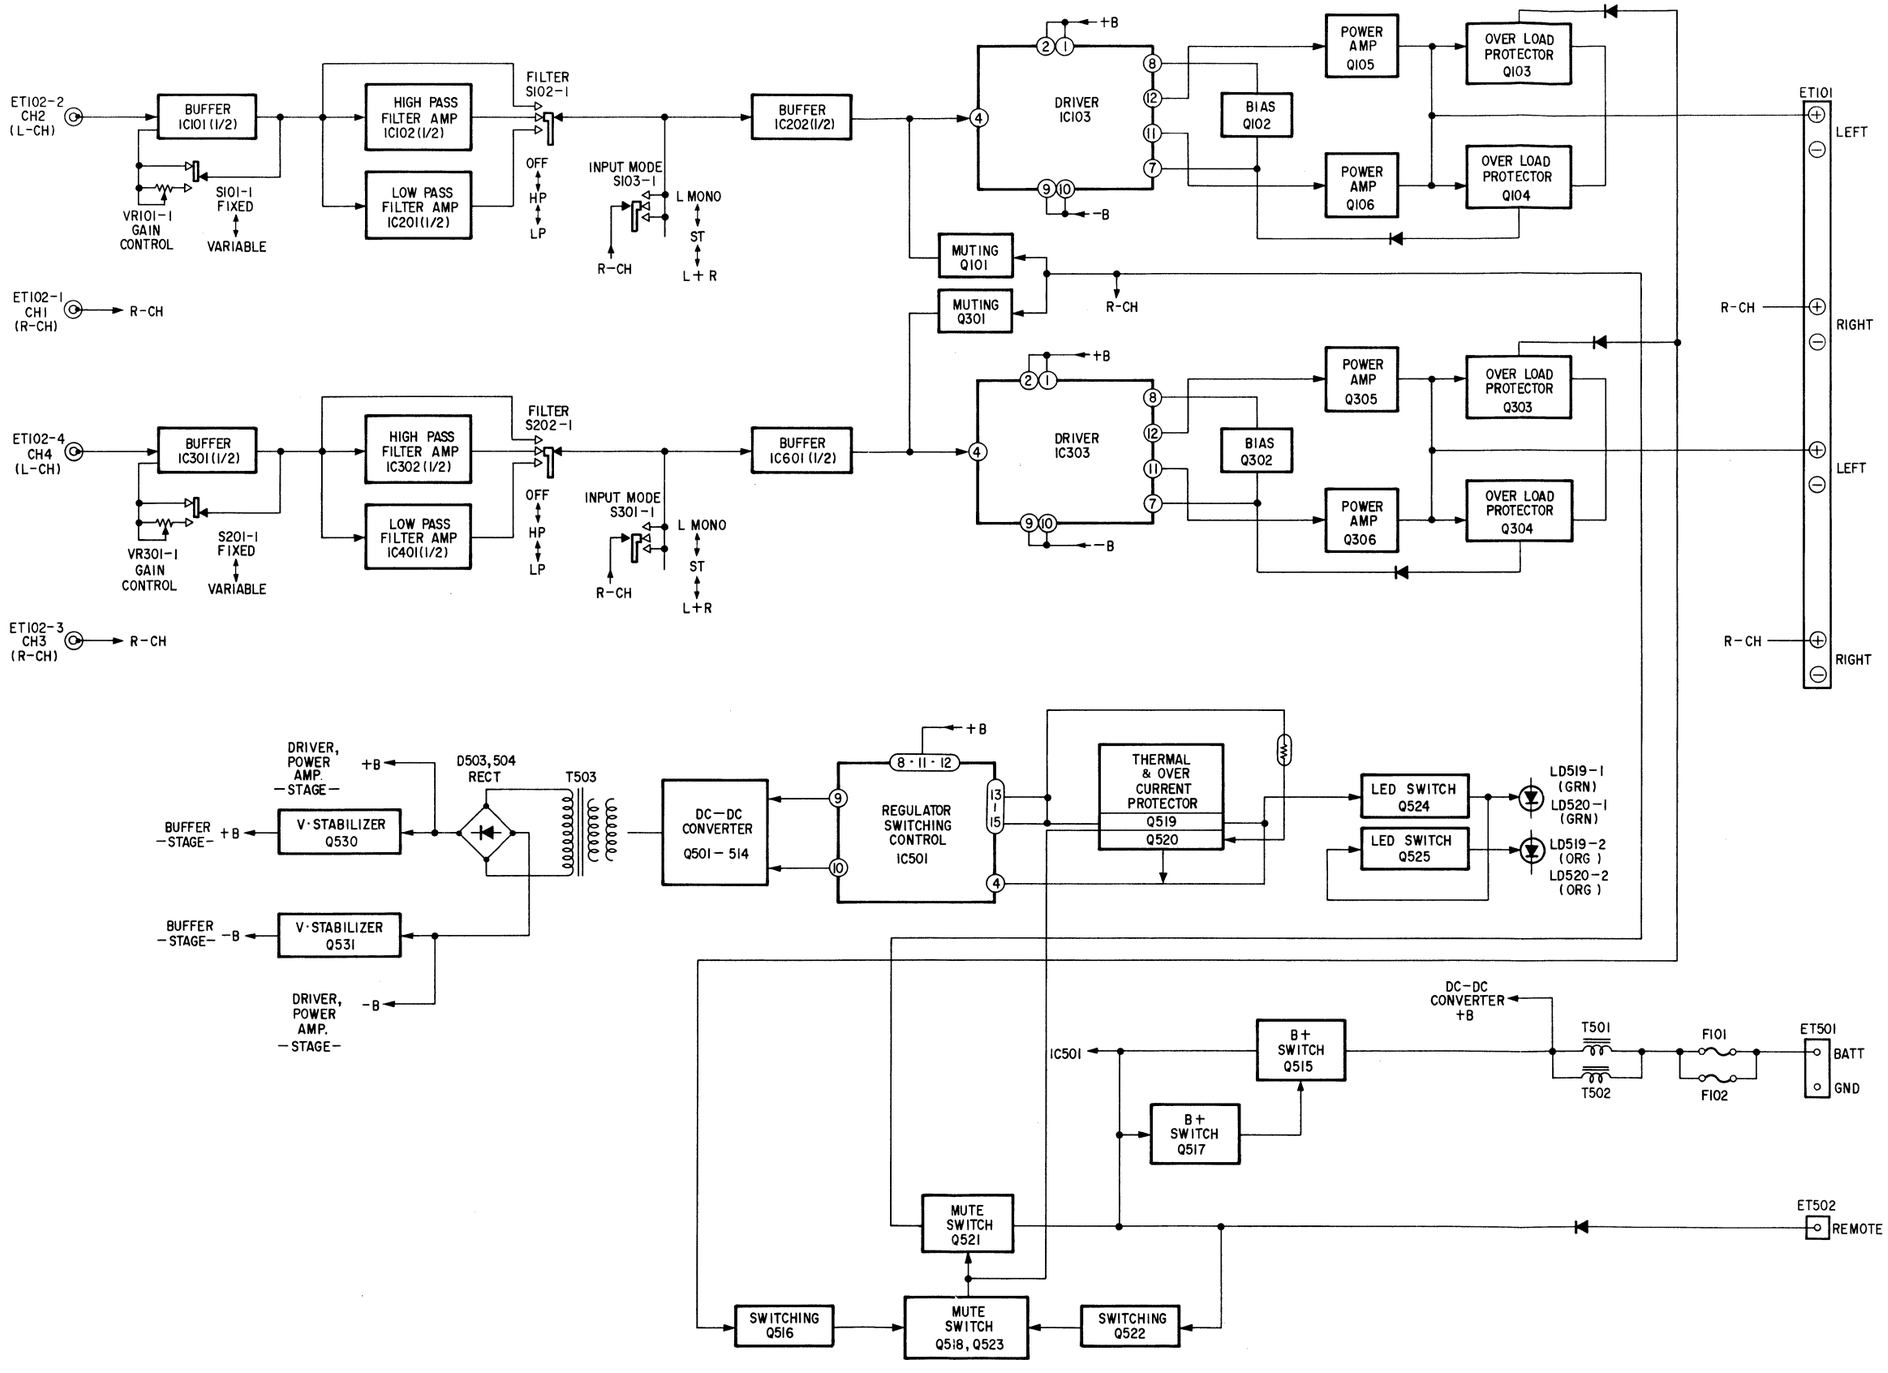

Parts Layout on P.C.Boards and Wiring Diagram

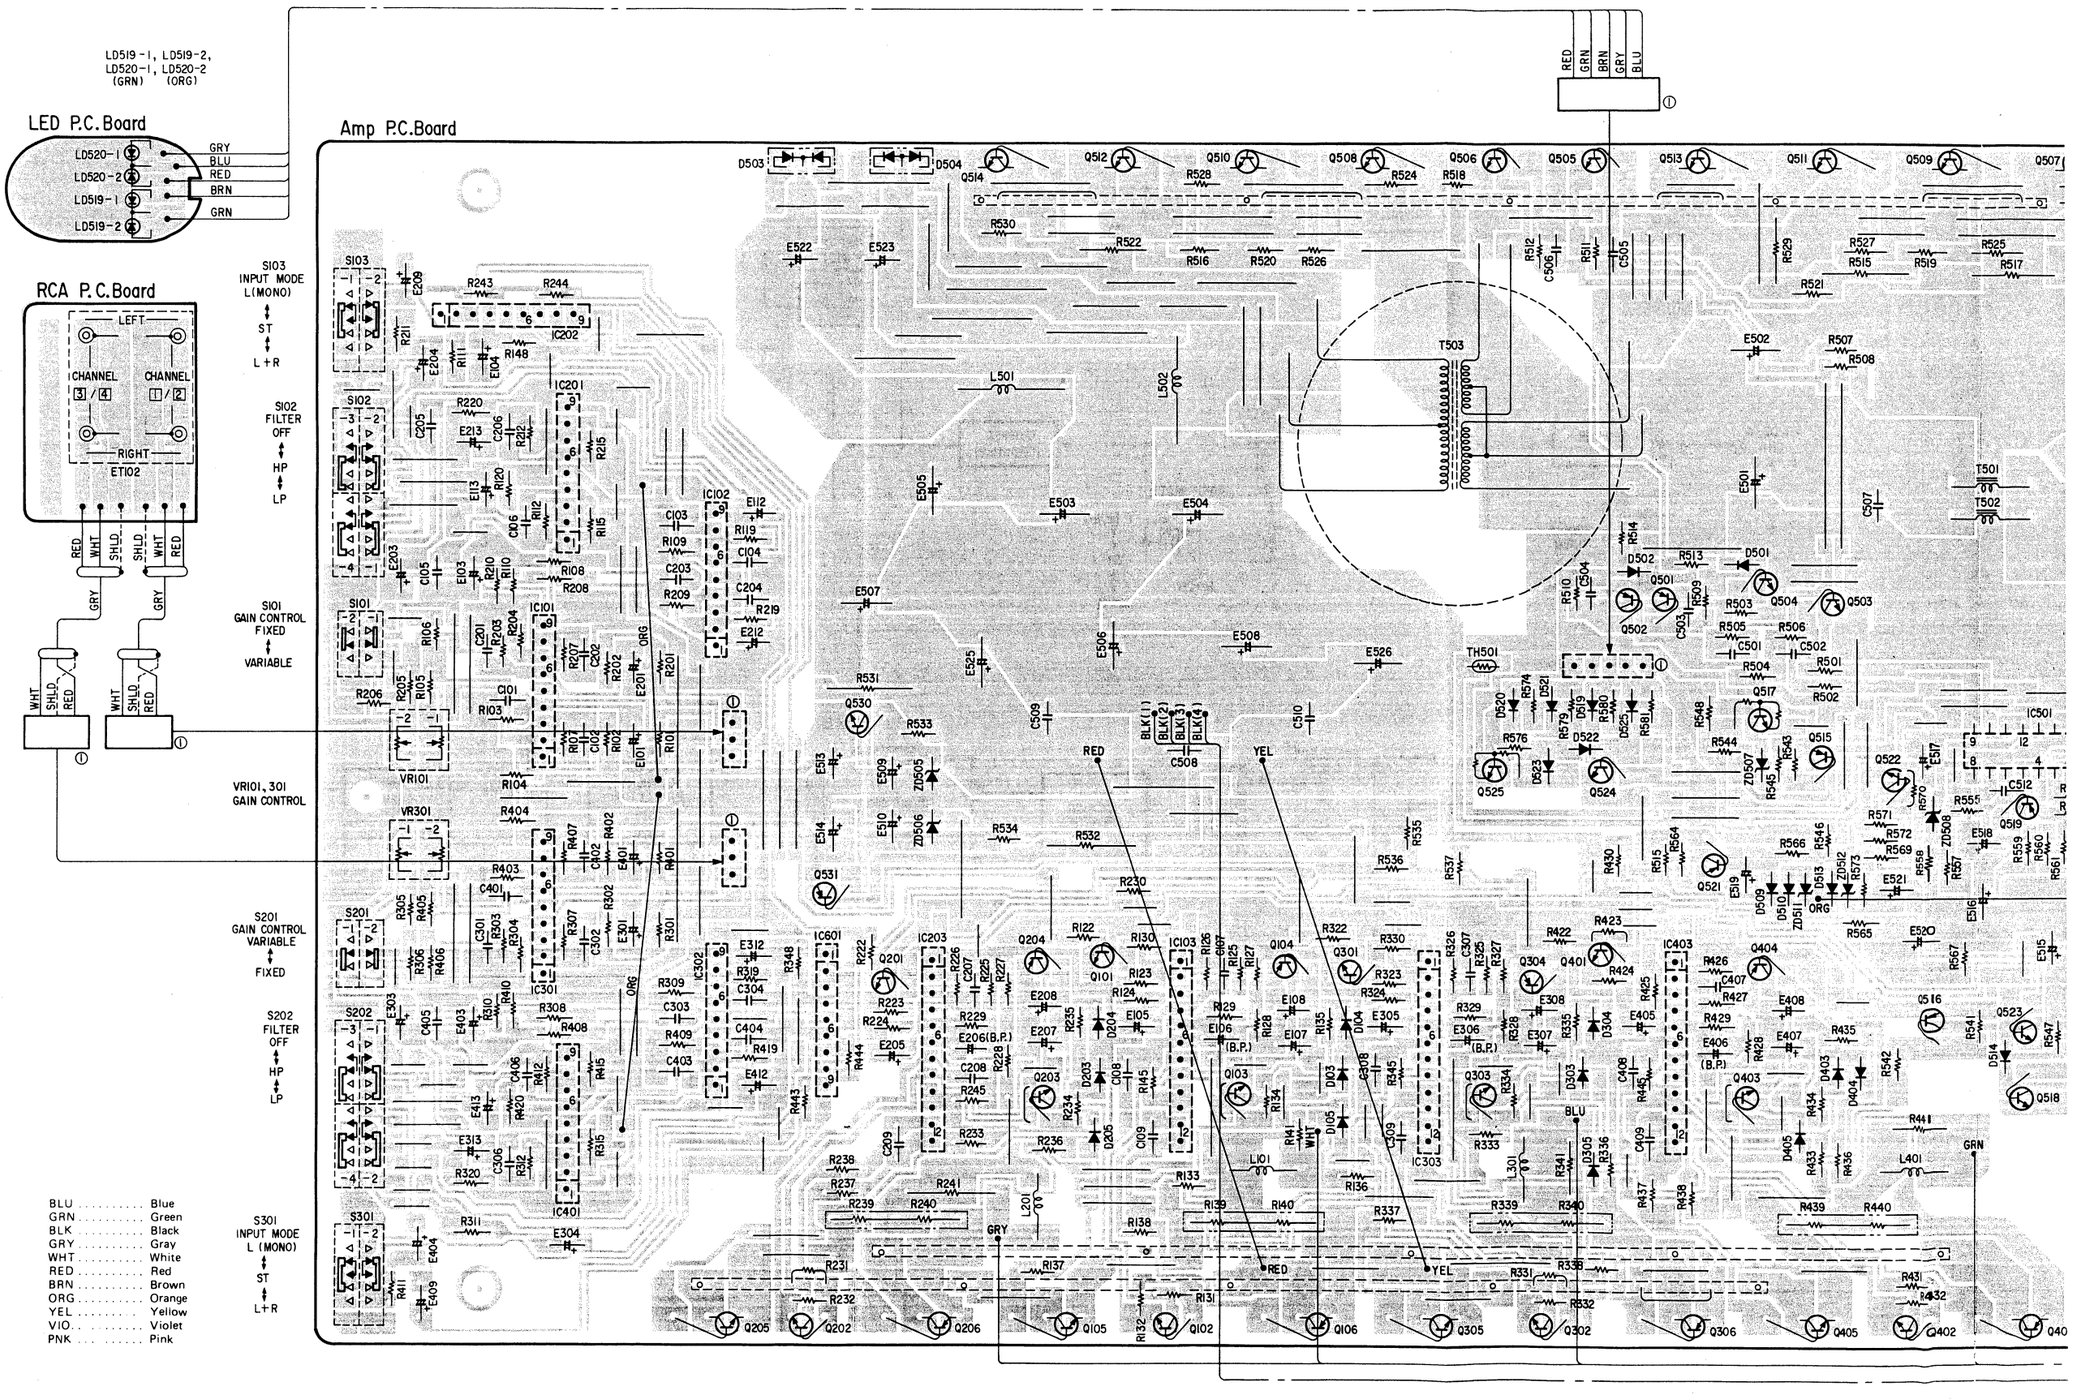

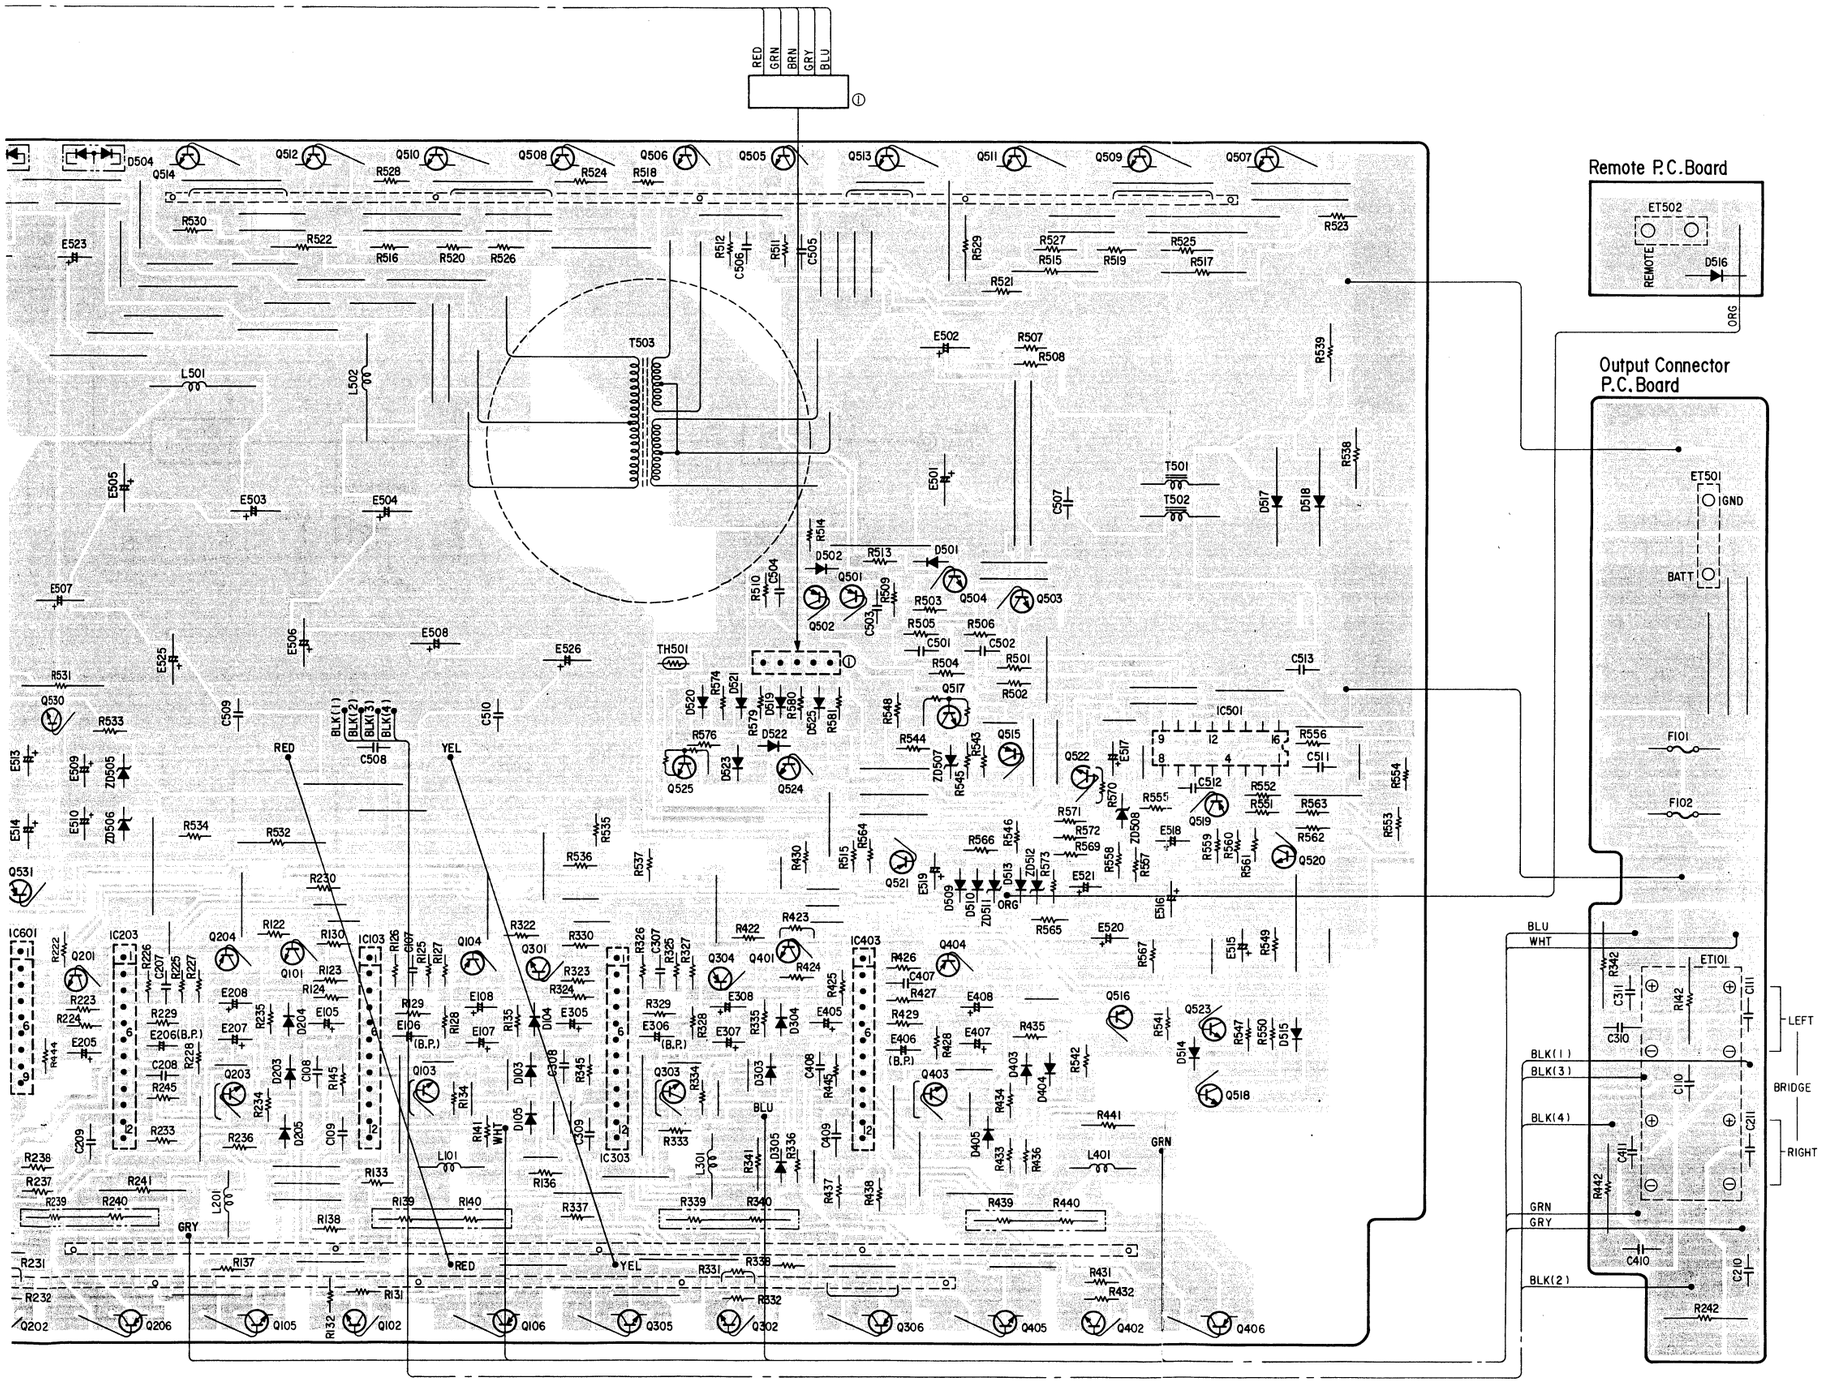
RED
GRN
BRN
GRY
BLU
Remote P.C.Board
ET502
REMOTE
D516
ORG
Output Connector
P.C.Board
ET501
GND
BATT
BLU
WHT
BLK(1)
BLK(3)
BLK(4)
GRN
GRY
BLK(2)
LEFT
BRIDGE
RIGHT
RED
YEL
BLU
GRN
GRY
ORG
T503
T501
T502
L501
L502
TH501
IC601
IC203
IC103
IC303
IC403
IC501
F101
F102
ET101

Schematic Diagram (Refer to reverse side for IC's and Transistors voltage values.)

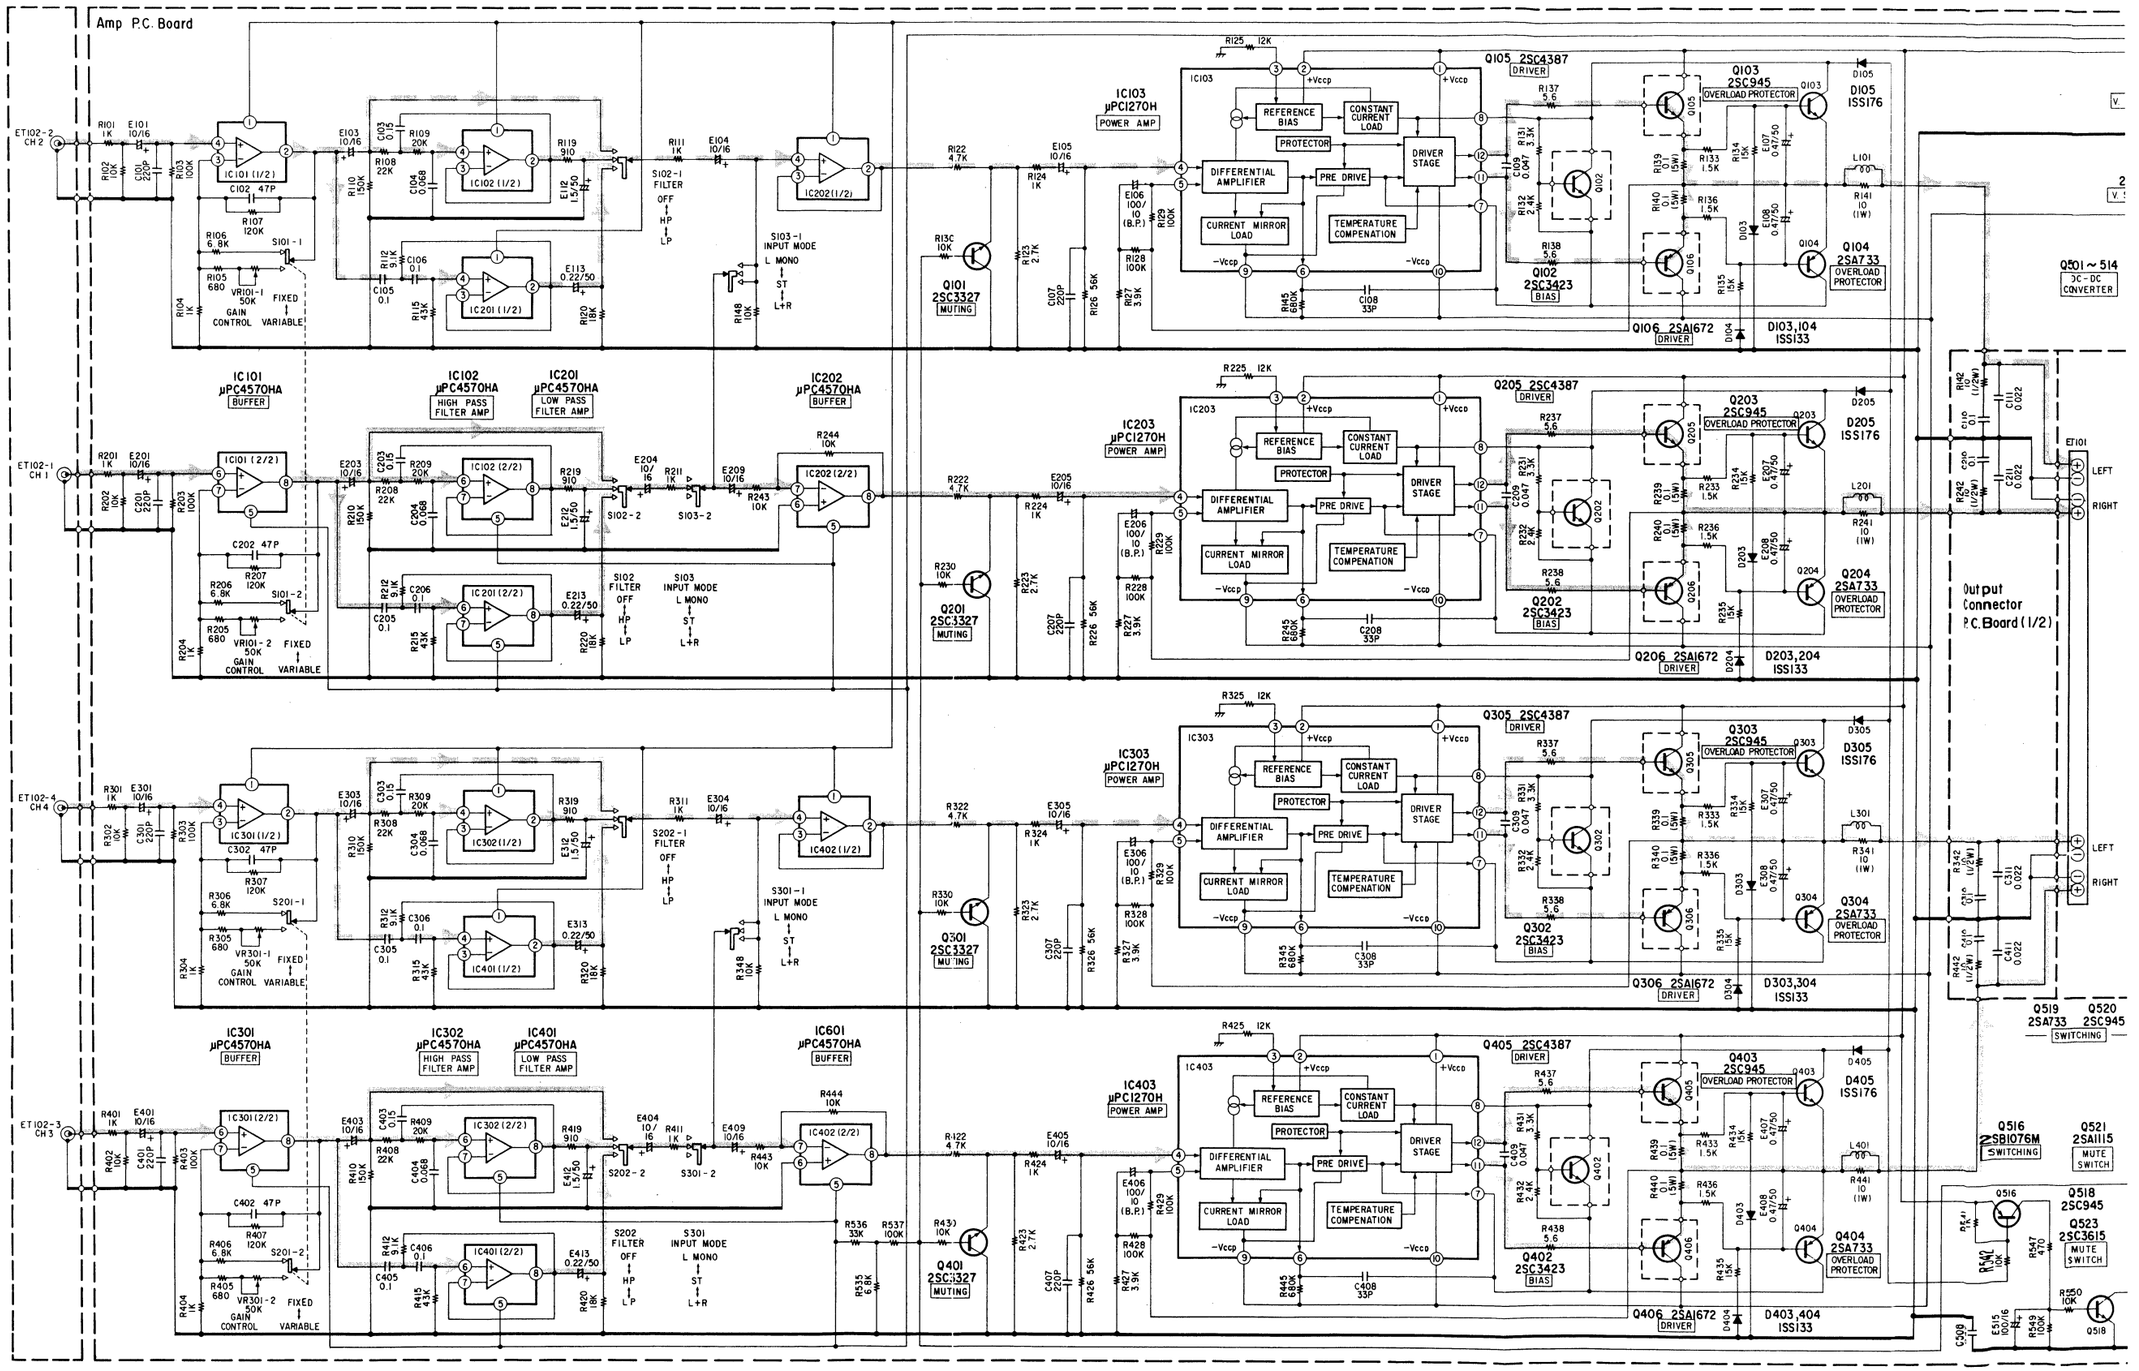

/oltage values.)

NOTE:
1. All resistance values are in ohms. K= 1,000 M= 1,000,000
2. All capacitance values are in microfarads. P= 1/1,000,000

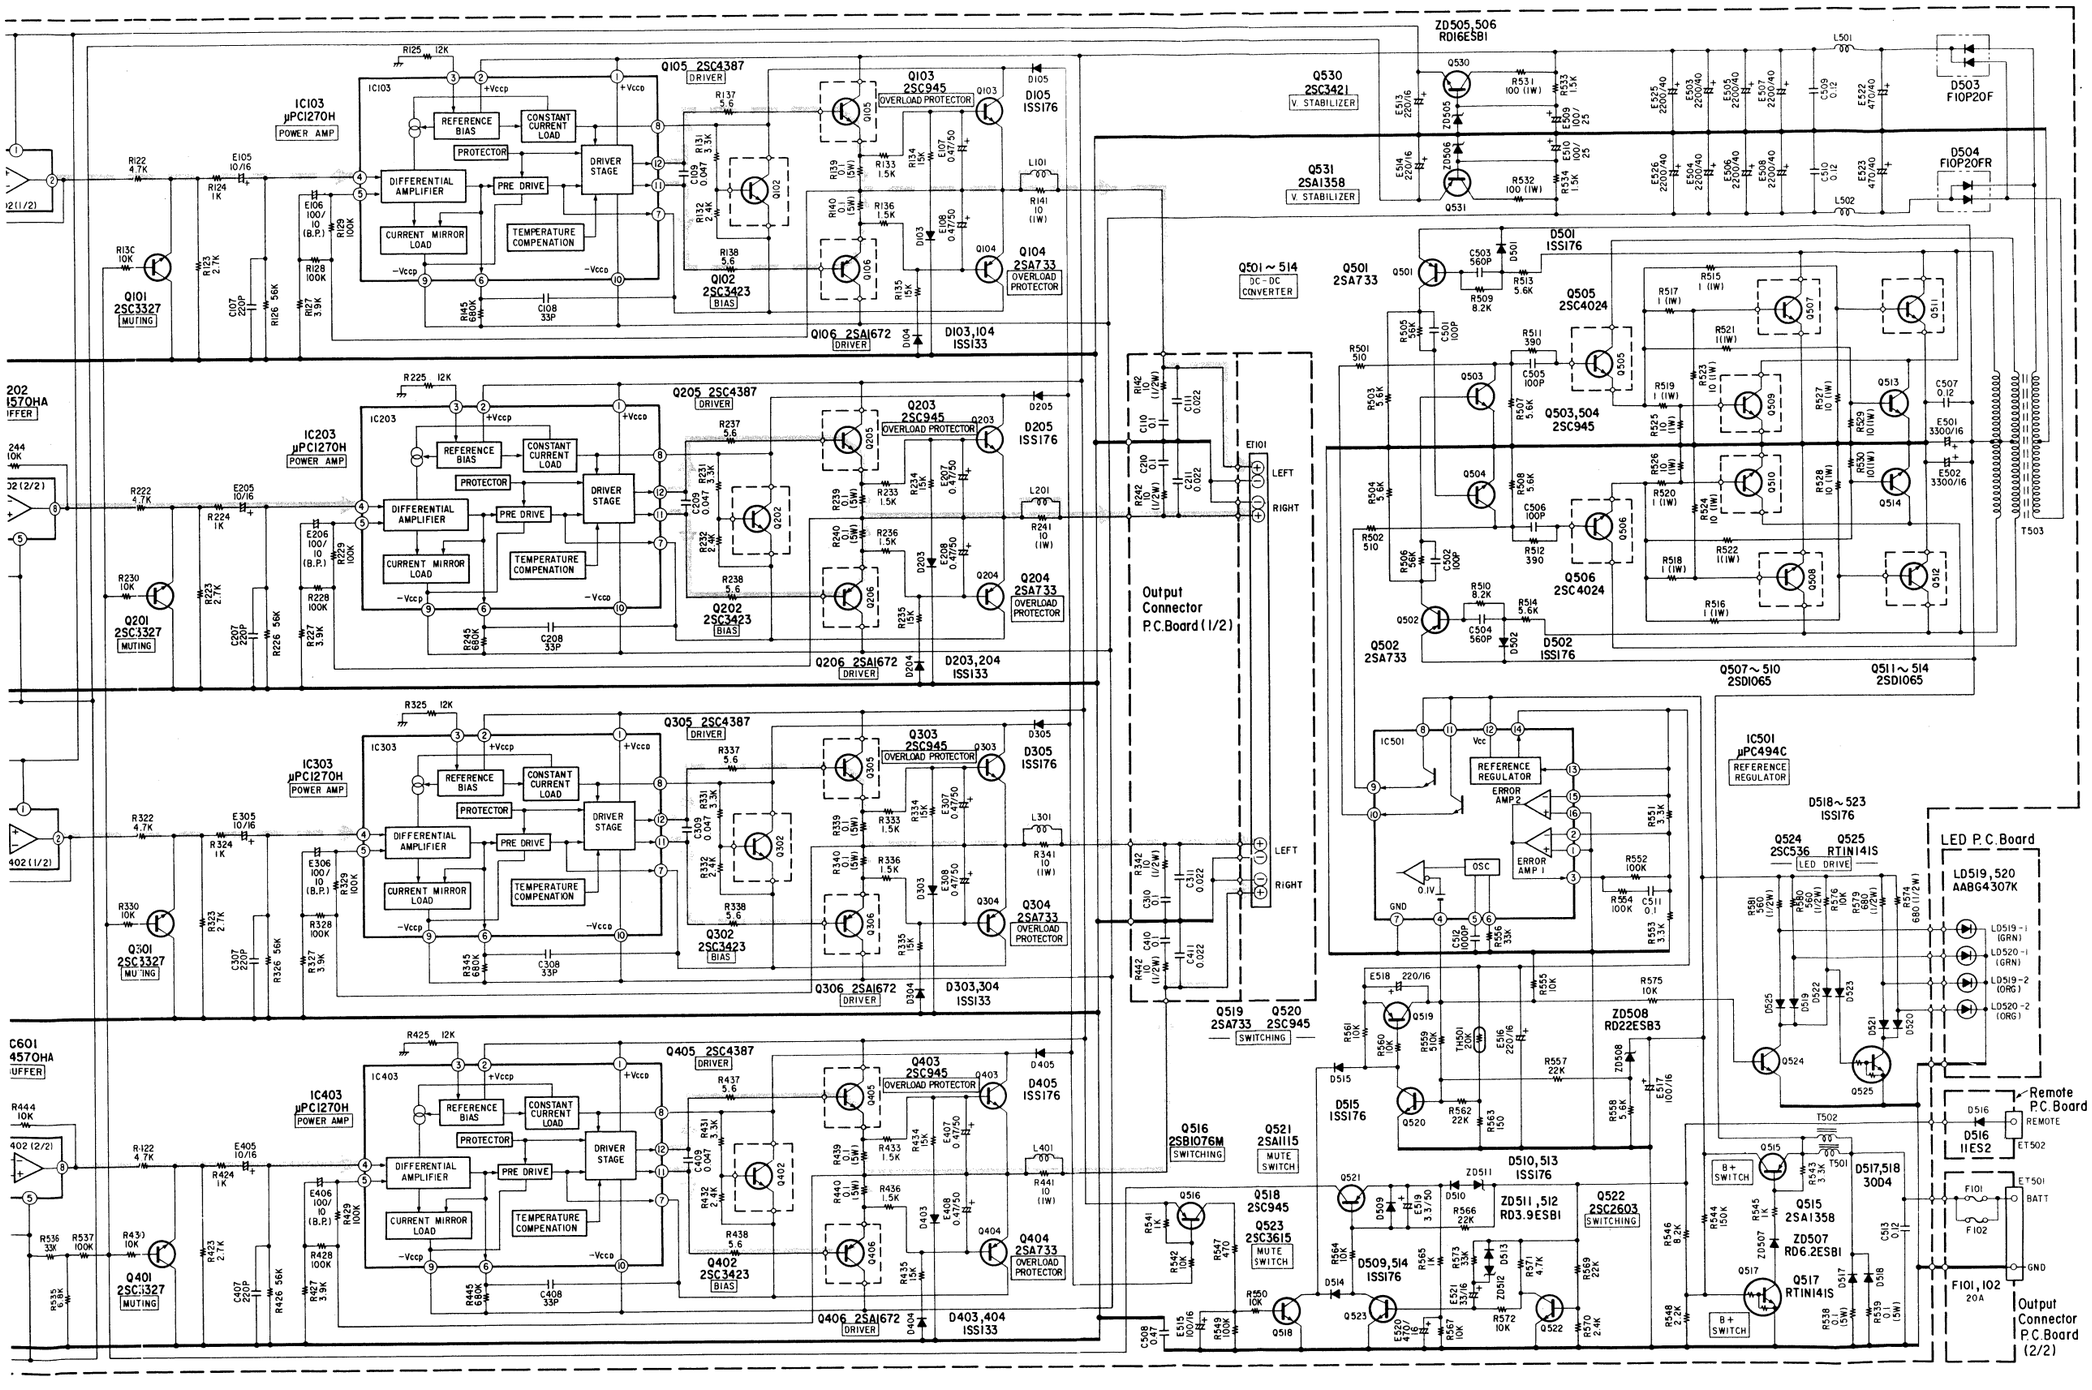

IC'S And Transistors Voltage Values

IC Pin No.	IC101	IC102	IC201	IC202
1	15.3V	15.3V	15.3V	15.3V
2	40mV	7mV	7mV	12mV
3	5mV	0V	0V	10mV
4	5mV	0V	0V	10mV
5	-15.1V	-15.1V	-15.1V	-15.1V
6	5mV	0V	0V	10mV
7	5mV	0V	0V	10mV
8	40mV	7mV	7mV	12mV

IC Pin No.	IC103	IC203	IC303	IC403
1	35.6V	35.6V	35.6V	35.6V
2	35.6V	35.6V	35.6V	35.6V
3	34V	34V	34V	34V
4	0.1V	0.1V	0.1V	0.1V
5	0.1V	0.1V	0.1V	0.1V
6	-34V	-34V	-34V	-34V
7	-1.2V	-1.2V	-1.2V	-1.2V
8	0.4V	0.4V	0.4V	0.4V
9	-35.6V	-35.6V	-35.6V	-35.6V
10	-35.6V	-35.6V	-35.6V	-35.6V
11	-0.7V	-0.7V	-0.7V	-0.7V
12	0.5V	0.5V	0.5V	0.5V

IC Pin No.	IC301	IC302	IC402
1	15.3V	15.3V	15.3V
2	40mV	7mV	12mV
3	5mV	0V	10mV
4	5mV	0V	10mV
5	-15.1V	-15.1V	-15.1V
6	5mV	0V	10mV
7	5mV	0V	10mV
8	40mV	7mV	12mV

IC Pin No.	IC501
1	0V
2	2.45V
3	0.1V
4	0V
5	1.8V
6	3.8V
7	0V
8	14.3V
9	6V
10	6V
11	14.3V
12	14.3V
13	5V
14	5V
15	5V
16	0V

Pin No. Transistor	E	C	B
Q101	0V	0V	0V
Q102	-1.2V	0.4V	-0.3V
Q103	0V	27.6V	0V
Q104	0V	-2.1V	0V
Q105	2.5mV	35.6V	0.5V
Q106	-3mV	-35.6V	-0.7V
Q201	0V	0V	0V
Q202	-1.2V	0.4V	-0.3V
Q203	0V	27.6V	0V
Q204	0V	-2.1V	0V
Q205	2.5mV	35.6V	0.5V
Q206	-3mV	-35.6V	-0.7V
Q301	0V	0V	0V
Q302	-1.2V	0.4V	-0.3V
Q303	0V	27.6V	0V
Q304	0V	-2.1V	0V
Q305	2.5mV	35.6V	0.5V
Q306	-3mV	-35.6V	-0.7V
Q401	0V	0V	0V
Q402	-1.2V	0.4V	-0.3V
Q403	0V	27.6V	0V
Q404	0V	-2.1V	0V
Q405	2.5mV	35.6V	0.5V
Q406	-3mV	-35.6V	-0.7V
Q501	14.3V	7.5V	15V
Q502	14.3V	7.5V	15V
Q503	0V	2.1V	0.3V
Q504	0V	2.1V	0.3V
Q505	0.7V	14.4V	1.1V
Q506	0.7V	14.4V	1.1V
Q507	0V	14.4V	0.3V
Q508	0V	14.4V	0.3V
Q509	0V	14.4V	0.3V
Q510	0V	14.4V	0.3V
Q511	0V	14.4V	0.3V
Q512	0V	14.4V	0.3V
Q513	0V	14.4V	0.3V
Q514	0V	14.4V	0.3V
Q515	14.4V	14.3V	13.5V
Q516	35.6V	0V	35.6V
Q517	0V	0.1V	3V
Q518	0V	5V	0V
Q519	5V	0V	5V
Q520	0V	5V	0V
Q521	10V	0V	10.6V
Q522	0V	0.3V	0.6V
Q523	0V	10V	0.1V
Q524	0V	0.8V	0V
Q525	0.6V	0V	14V
Q530	15.3V	23.6V	15.9V
Q531	-15.1V	-23.6V	-15.8V

● Measuring Condition
1. Power Supply Voltage : DC14.4V.
2. Measuring Meter : Digital Multi Voltmeter.
3. Measuring Point Reference : Between Ground.
4. Measuring Conditions : No Signal Input.

Exploded View (Cabinet)

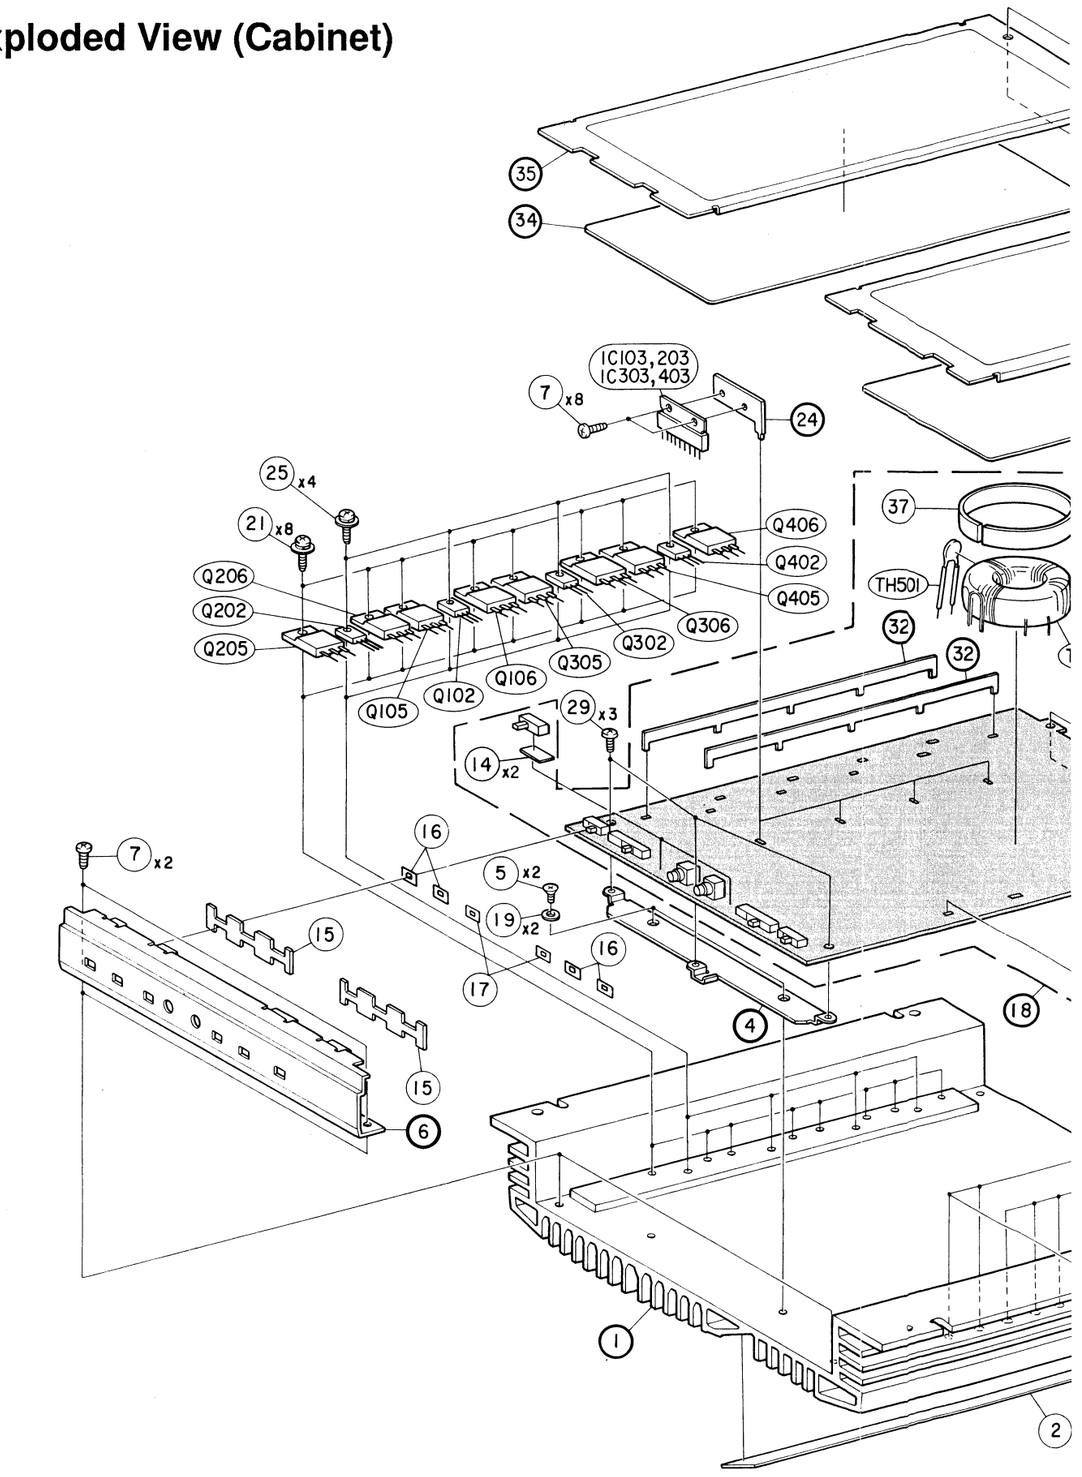

Exploded View (Cabinet)

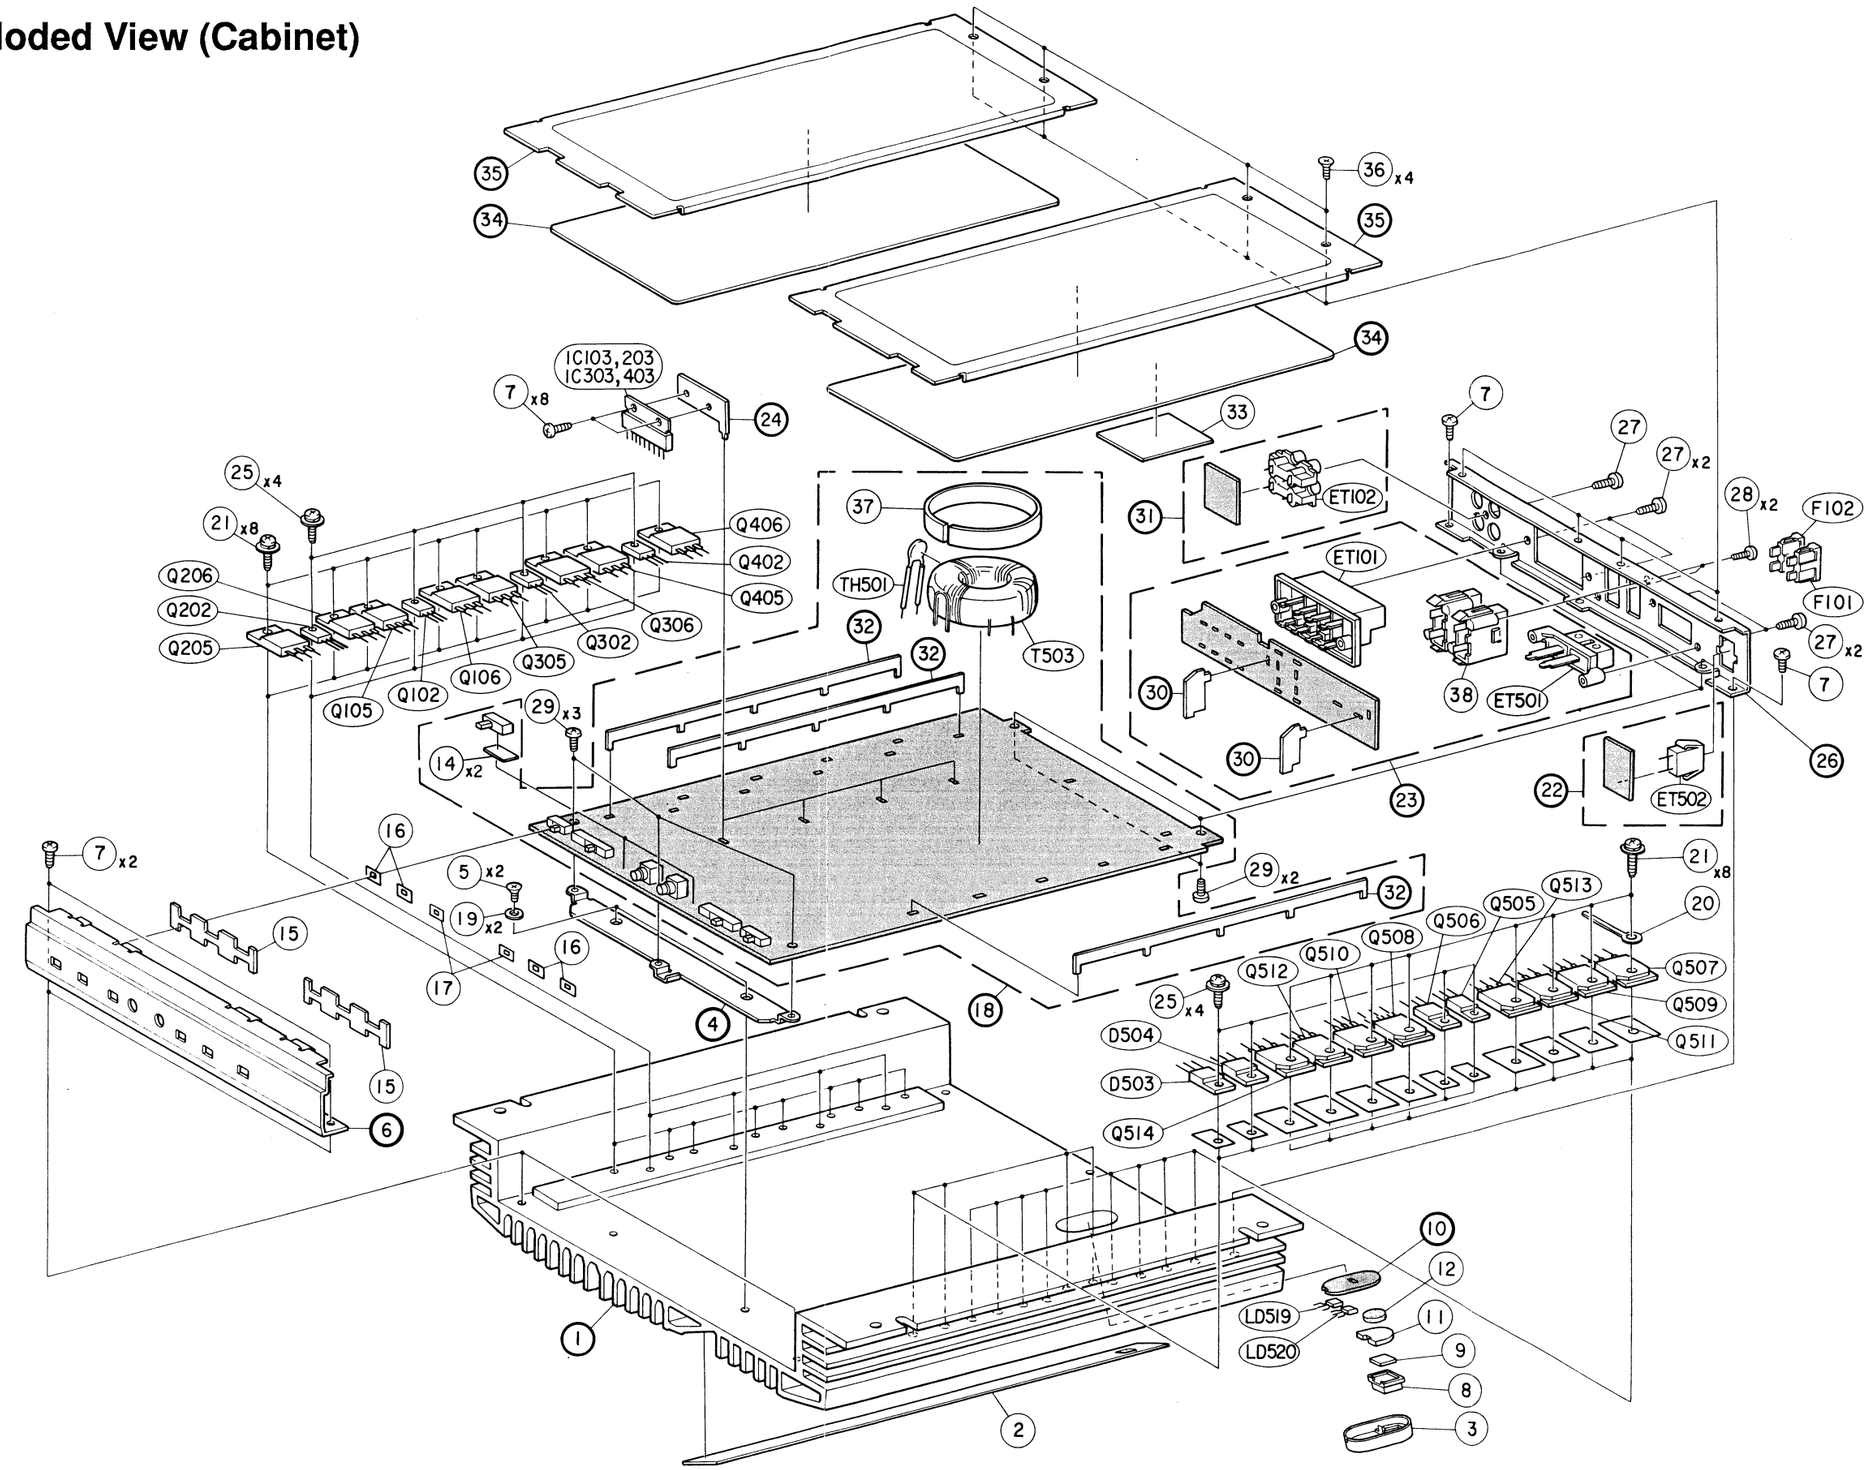

Cabinet Assembly Parts List

Symbol No.	Index	Part No.	Description		
2	5-E	15E06494S01	Name Plate		
3	5-F	15E06495S01	Holder, LED		
5	4-C	03E06479S01	Screw, Countersink (M3 × 6)		
7	3-A	03E06480S01	Screw, Pan (M3 × 6)		
8	5-F	36E06376S01	Lens, LED		
9	5-F	36E06482S01	Base, Lens		
11	5-F	15E06483S01	Guide, Lens		
12	5-F	75E06484S01	Spacer, LED		
14	3-C	43E06498S01	Spacer, Switch		
15	4-B	75E06485S01	Cushion, Switch		
16	3-B	43E06486S01	Cover, Switch		
17	4-C	43E06718S01	Cover, Switch A		
19	4-C	04E06487S01	Washer, Flat (M3)		
20	4-G	01E06717S01	Terminal; Lug GND		
21	2-B	03E06488S01	Screw, Pan (M3 × 11.5) With Washer		
25	2-B	03E06489S01	Screw, Pan (M3 × 9.5) With Washer		
27	2-G	03E06490S01	Screw, Pan (M3 × 6)		
28	2-G	03E06491S01	Screw, Pan (M2 × 6)		
29	3-C	03E06492S01	Screw, Bind (M3 × 5)		
33	2-E	15A81675F01	Insulator, Power Transformer		
36	1-F	03E06493S01	Screw, Countersink (M3 × 6)		
37	2-D	26A81610F02	Shield, CU		
38	3-F	15E06453S01	Holder, Auto Fuse		

NOTE: The parts without part numbers are not supplied.

Electrical Parts List

Resistors: Carbon resistors under 1/4 watts are not mentioned in the parts list, please confirm them by schematic diagram.
μ F = microfarads, pF = picofarads.

Symbol No.	Part No.	Description
	Abbreviations	
	RES. = Resistor	CAP. = Capacitor
	C.F. = Carbon Film	ELY. = Electrolytic
	M.F. = Metal Film	CER. = Ceramic
	M.O. = Metal Oxide Film	MYL. = Mylar
	M.P. = Metal Plate	TAN. = Tantalum
	TR. = Transistor	POLY. = Polystyrol
	TRANS. = Transformer	PP. = Polypropylene
	CP. = Chip	PLT. = Polyethylene
	Amp P.C.Board	
	IC's	
IC101	51T83403F03	μPC4570HA
IC102	51T83403F03	μPC4570HA
IC103	51E03492S01	μPC1270H
IC201	51T83403F03	μPC4570HA
IC202	51T83403F03	μPC4570HA
IC203	51E03492S01	μPC1270H
IC301	51T83403F03	μPC4570HA
IC302	51T83403F03	μPC4570HA
IC303	51E03492S01	μPC1270H
IC401	51T83403F03	μPC4570HA
IC403	51E03492S01	μPC1270H
IC501	51T70759F01	μPC494C
IC601	51T83403F03	μPC4570HA
	Transistors	
Q101	48E06355S01	2SC3327
Q102	48T64376F01	2SC3423
Q103	48E06455S01	2SC945
Q104	48E06356S01	2SA733
Q105	48E06363S01	2SC4387
Q106	48E06364S01	2SA1672
Q201	48E06355S01	2SC3327
Q202	48T64376F01	2SC3423
Q203	48E06455S01	2SC945
Q204	48E06356S01	2SA733
Q205	48E06363S01	2SC4387
Q206	48E06364S01	2SA1672
Q301	48E06355S01	2SC3327
Q302	48T64376F01	2SC3423
Q303	48E06455S01	2SC945
Q304	48E06356S01	2SA733
Q305	48E06363S01	2SC4387
Q306	48E06364S01	2SA1672
Q401	48E06355S01	2SC3327
Q402	48T64376F01	2SC3423
Q403	48E06455S01	2SC945
Q404	48E06356S01	2SA733
Q405	48E06363S01	2SC4387
Q406	48E06364S01	2SA1672
Q501	48E06356S01	2SA733
Q502	48E06356S01	2SA733
Q503	48E06455S01	2SC945
Q504	48E06455S01	2SC945
Q505	48T16440W01	2SC4024
Q506	48T16440W01	2SC4024
Q507	48T47613F01	2SD1065
Q508	48T47613F01	2SD1065
Q509	48T47613F01	2SD1065
Q510	48T47613F01	2SD1065
Q511	48T47613F01	2SD1065
Q512	48T47613F01	2SD1065
Q513	48T47613F01	2SD1065
Q514	48T47613F01	2SD1065
Q515	48T70761F01	2SA1358
Q516	48T81069F01	2SB1076M
Q517	48E06350S01	RT1N141S
Q518	48E06455S01	2SC945
Q519	48E06356S01	2SA733
Q520	48E06455S01	2SC945
Q521	48E06348S01	2SA1115
Q522	48E06347S01	2SC2603
Q523	48E06358S01	2SC3615
Q524	48E06454S01	2SC536
Q525	48E06350S01	RT1N141S
Q530	48T69176F02	2SC3421
Q531	48T70761F01	2SA1358
	Diodes	
D103	48T68829F01	1SS133
D104	48T68829F01	1SS133
D105	48T58583F01	1SS176TA
D203	48T68829F01	1SS133
D204	48T68829F01	1SS133
D205	48T58583F01	1SS176TA
D303	48T68829F01	1SS133
D304	48T68829F01	1SS133
D305	48T58583F01	1SS176TA
D403	48T68829F01	1SS133
D404	48T68829F01	1SS133
D405	48T58583F01	1SS176TA
D501	48T58583F01	1SS176TA
D502	48T58583F01	1SS176TA
D503	48E04804S01	F10P20F
D504	48E04803S01	F10P20FR
D509	48T58583F01	1SS176TA
D510	48T58583F01	1SS176TA
D513	48T58583F01	1SS176TA
D514	48T58583F01	1SS176TA
D515	48T58583F01	1SS176TA
D517	48E06456S01	30D4
D518	48E06456S01	30D4

Symbol No.	Part No.	Description
D519	48T58583F01	1SS176TA
D520	48T58583F01	1SS176TA
D521	48T58583F01	1SS176TA
D522	48T58583F01	1SS176TA
D523	48T58583F01	1SS176TA
D525	48T58583F01	1SS176TA
ZD505	48E06353S01	Zener, RD16ESB1
ZD506	48E06353S01	Zener, RD16ESB1
ZD507	48E06352S01	Zener, RD6.2ESB1
ZD508	48E06354S01	Zener, RD22ESB3
ZD511	48E06351S01	Zener, RD3.9ESB1
ZD512	48E06351S01	Zener, RD3.9ESB1

Capacitors

C101	21E06324S01	CER., 220pF
E101	23E04816S01	ELY., 10μF/16V
C102	21E06322S01	CER., 47pF
C103	08E06460S01	MMT., 0.15μF
E103	23E04816S01	ELY., 10μF/16V
C104	08E06463S01	MMT., 0.068μF
E104	23E04816S01	ELY., 10μF/16V
C105	08E06459S01	MMT., 0.1μF
E105	23E04816S01	ELY., 10μF/16V
C106	08E06459S01	MMT., 0.1μF
E106	23E06330S01	ELY., (B.P.) 100μF/10V
C107	21E06324S01	CER., 220pF
E107	23E04826S01	ELY., 0.47μF/50V
C108	21E06321S01	CER., 33pF
E108	23E04826S01	ELY., 0.47μF/50V
C109	08E06462S01	MMT., 0.047μF
E112	23E06329S01	ELY., 1.5μF/50V
E113	23E06327S01	ELY., 0.22μF/50V
C201	21E06324S01	CER., 220pF
E201	23E04816S01	ELY., 10μF/16V
C202	21E06322S01	CER., 47pF
C203	08E06460S01	MMT., 0.15μF
E203	23E04816S01	ELY., 10μF/16V
C204	08E06463S01	MMT., 0.068μF
E204	23E04816S01	ELY., 10μF/16V
C205	08E06459S01	MMT., 0.1μF
E205	23E04816S01	ELY., 10μF/16V
C206	08E06459S01	MMT., 0.1μF
E206	23E06330S01	ELY., (B.P) 100μF/10V
C207	21E06324S01	CER., 220pF
E207	23E04826S01	ELY., 0.47μF/50V
C208	21E06321S01	CER., 33pF
E208	23E04826S01	ELY., 0.47μF/50V
C209	08E06462S01	MMT., 0.047μF
E209	23E04816S01	ELY., 10μF/16V
E212	23E06329S01	ELY., 1.5μF/50V
E213	23E06327S01	ELY., 0.22μF/50V
C301	21E06324S01	CER., 220pF

Symbol No.	Part No.	Description
E301	23E04816S01	ELY., 10μF/16V
C302	21E06322S01	CER., 47pF
C303	08E06460S01	MMT., 0.15μF
E303	23E04816S01	ELY., 10μF/16V
C304	08E06463S01	MMT., 0.068μF
E304	23E04816S01	ELY., 10μF/16V
C305	08E06459S01	MMT., 0.1μF
E305	23E04816S01	ELY., 10μF/16V
C306	08E06459S01	MMT., 0.1μF
E306	23E06330S01	ELY., (B.P.) 100μF/10V
C307	21E06324S01	CER., 220pF
E307	23E04826S01	ELY., 0.47μF/50V
C308	21E06321S01	CER., 33pF
E308	23E04826S01	ELY., 0.47μF/50V
C309	08E06462S01	MMT., 0.047μF
E312	23E06329S01	ELY., 1.5μF/50V
E313	23E06327S01	ELY., 0.22μF/50V
C401	21E06324S01	CER., 220pF
E401	23E04816S01	ELY., 10μF/16V
C402	21E06322S01	CER., 47pF
C403	08E06460S01	MMT., 0.15μF
E403	23E04816S01	ELY., 10μF/16V
C404	08E06463S01	MMT., 0.068μF
E404	23E04816S01	ELY., 10μF/16V
C405	08E06459S01	MMT., 0.1μF
E405	23E04816S01	ELY., 10μF/16V
C406	08E06459S01	MMT., 0.1μF
E406	23E06330S01	ELY., (B.P.) 100μF/10V
C407	21E06324S01	CER., 220pF
E407	23E04826S01	ELY., 0.47μF/50V
C408	21E06321S01	CER., 33pF
E408	23E04826S01	ELY., 0.47μF/50V
C409	08E06462S01	MMT., 0.047μF
E409	23E04816S01	ELY., 10μF/16V
E412	23E06329S01	ELY., 1.5μF/50V
E413	23E06327S01	ELY., 0.22μF/50V
C501	21E06323S01	CER., 100pF
E501	23E06331S01	ELY., 3300μF/16V
C502	21E06323S01	CER., 100pF
E502	23E06331S01	ELY., 3300μF/16V
C503	21E06325S01	CER., 560pF
E503	23E06335S01	ELY., 2200μF/40V
C504	21E06325S01	CER., 560pF
E504	23E06335S01	ELY., 2200μF/40V
C505	21E06323S01	CER., 100pF
E505	23E06335S01	ELY., 2200μF/40V
C506	21E06323S01	CER., 100pF
E506	23E06335S01	ELY., 2200μF/40V
C507	08E06458S01	TF., 0.12μF
E507	23E06335S01	ELY., 2200μF/40V
C508	08E06318S01	MTL., 0.47μF
E508	23E06335S01	ELY., 2200μF/40V
C509	08E06458S01	TF., 0.12μF
E509	23E04821S01	ELY., 100μF/25V

Symbol No.	Part No.	Description		
C510	08E06458S01	TF., 0.12μF		
E510	23E04821S01	ELY., 100μF/25V		
C511	08E06457S01	TF., 0.1μF		
C512	08E06317S01	MYL., 1000pF		
C513	08E06458S01	TF., 0.12μF		
E513	23E06326S01	ELY., 220μF/16V		
E514	23E06326S01	ELY., 220μF/16V		
E515	23E04833S01	ELY., 100μF/16V		
E516	23E06326S01	ELY., 220μF/16V		
E517	23E04833S01	ELY., 100μF/16V		
E518	23E06326S01	ELY., 220μF/16V		
E519	23E06328S01	ELY., 3.3μF/50V		
E520	23E06332S01	ELY., 470μF/16V		
E521	23E04866S01	ELY., 33μF/16V		
E522	23E06336S01	ELY., 470μF/40V		
E523	23E06336S01	ELY., 470μF/40V		
E525	23E06335S01	ELY., 2200μF/40V		
E526	23E06335S01	ELY., 2200μF/40V		
Resistors				
R139, R140	06E06385S01	Cement, 0.1 ohm 5W×2		
R141	06E06383S01	SPR, 10 ohm 1W		
R239, R240	06E06385S01	Cement, 0.1 ohm 5W×2		
R241	06E06383S01	SPR, 10 ohm 1W		
R339, R340	06E06385S01	Cement, 0.1 ohm 5W×2		
R341	06E06383S01	SPR, 10 ohm 1W		
R439, R440	06E06385S01	Cement, 0.1 ohm 5W×2		
R441	06E06383S01	SPR, 10 ohm 1W		
R515	06E06382S01	SPR, 1 ohm 1W		
R516	06E06382S01	SPR, 1 ohm 1W		
R517	06E06382S01	SPR, 1 ohm 1W		
R518	06E06382S01	SPR, 1 ohm 1W		
R519	06E06382S01	SPR, 1 ohm 1W		
R520	06E06382S01	SPR, 1 ohm 1W		
R521	06E06382S01	SPR, 1 ohm 1W		
R522	06E06382S01	SPR, 1 ohm 1W		
R523	06E06383S01	SPR, 10 ohm 1W		
R524	06E06383S01	SPR, 10 ohm 1W		
R525	06E06383S01	SPR, 10 ohm 1W		
R526	06E06383S01	SPR, 10 ohm 1W		
R527	06E06383S01	SPR, 10 ohm 1W		
R528	06E06383S01	SPR, 10 ohm 1W		
R529	06E06383S01	SPR, 10 ohm 1W		
R530	06E06383S01	SPR, 10 ohm 1W		
R531	06E06384S01	SPR, 100 ohm 1W		
R532	06E06384S01	SPR, 100 ohm 1W		
R538	06E06387S01	Cement, 0.1 ohm 5W		
R539	06E06387S01	Cement, 0.1 ohm 5W		
R574	06E06381S01	SPR, 680 ohm 1/2W		

Symbol No.	Part No.	Description		
R579	06E06381S01	SPR, 680 ohm 1/2W		
R580	06E06380S01	SPR, 560 ohm 1/2W		
R581	06E06380S01	SPR, 560 ohm 1/2W		
Volumes / Switches				
S101	40E06346S01	Slide, SSSJ12 (FIX/VARIABLE)		
S102	40E06344S01	Slide, SSSJ14 (FILTER)		
S103	40E06345S01	Slide, SSSJ12 (INPUT MODE)		
S201	40E06346S01	Slide, SSSJ12 (FIX/VARIABLE)		
S202	40E06344S01	Slide, SSSJ14 (FILTER)		
S301	40E06345S01	Slide, SSSJ12 (INPUT MODE)		
VR101	18E06386S01	Volume, 50K ohm × 2		
VR301	18E06386S01	Volume, 50K ohm × 2		
Thermistor				
TH501	48E06365S01	TD5-C320DA2 20K ohm		
Coils / Transformers				
L101	24E06338S01	Coil, 1.1μH		
L201	24E06338S01	Coil, 1.1μH		
L301	24E06338S01	Coil, 1.1μH		
L401	24E06338S01	Coil, 1.1μH		
L501	24E06339S01	Choke		
L502	24E06339S01	Choke		
T501	25E06343S01	Choke		
T502	25E06343S01	Choke		
T503	25E06341S01	Power, TRANS.		
Output Connector P.C.Board				
Capacitors				
C110	08E06459S01	MMT., 0.1μF		
C111	08E06461S01	MMT., 0.022μF		
C210	08E06459S01	MMT., 0.1μF		
C211	08E06461S01	MMT., 0.022μF		
C310	08E06459S01	MMT., 0.1μF		
C311	08E06461S01	MMT., 0.022μF		
C410	08E06459S01	MMT., 0.1μF		
C411	08E06461S01	MMT., 0.022μF		
Resistors				
R142	06E06379S01	SPR, 10 ohm 1/2W		
R242	06E06379S01	SPR, 10 ohm 1/2W		
R342	06E06379S01	SPR, 10 ohm 1/2W		
R442	06E06379S01	SPR, 10 ohm 1/2W		

Symbol No.	Part No.	Description		
Remote P.C.Board				
Diode				
D516	48T84052F01	11ES2-TA1		
LED P.C.Board				
LED's				
LD519	48E06366S01	AABG4307K (ORG/GRN)		
LD520	48E06366S01	AABG4307K (ORG/GRN)		
Miscellaneous				
ET101	29E06476S01	Terminal, 8P (Speaker)		
ET102	09E06320S01	RCA, Socket 4P		
ET501	29E06475S01	Terminal, 2P (BATT/GND)		
ET502	01E06307S01	Assy, Coupler 2P (REMOTE)		
F101	65E06377S01	Fuse, Auto 20A		
F102	65E06377S01	Fuse, Auto 20A		

Packing Method View

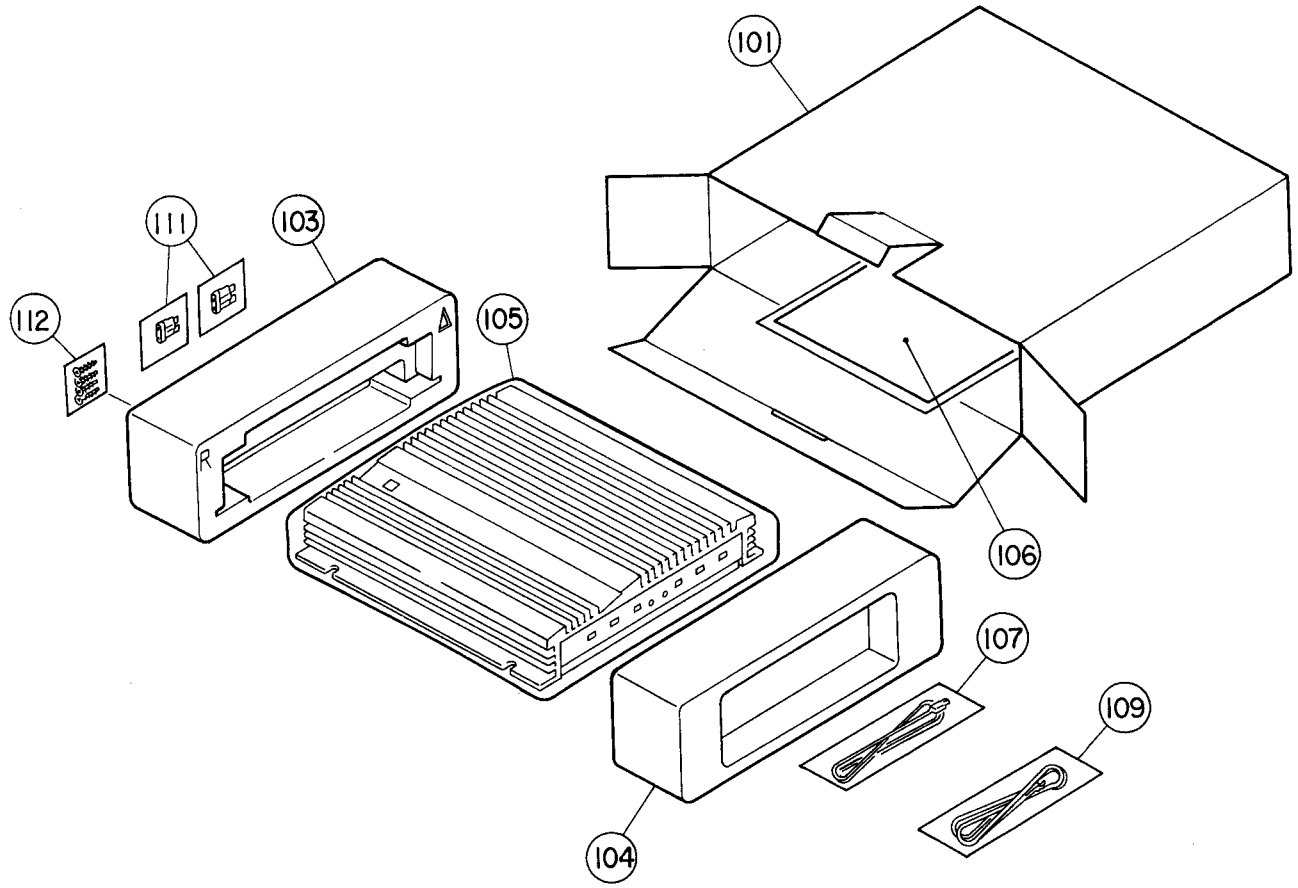

Packing Assembly Parts List

Symbol No.	Part No.	Description		
● 101	56E06371S01	Carton, Packing		
■ 101	56E06373S01	Carton, Packing		
103	56D13222W02	Tray, Packing (R)		
104	56D13222W01	Tray, Packing (L)		
105	56B72811F08	Sack, Polyethylene		
● 106	68P94789F35	Owners, Manual		
■ 106	68P94789F37	Owners, Manual		
107	01E06310S01	Assy, Remote Cord		
109	01E06306S01	Assy, Power Cord		

Symbol No.	Part No.	Description		
111	65E06377S01	Auto, Fuse (20A)		
112	01E06497S01	Assy, Screw Kit		

NOTE: ●: For North America Model Only (AO)
■: For General Export Model Only (GO)
Others Common

Semi-Conductor Lead Identifications

μPC4570HA: IC101, 102, 201, 202
IC301, 302, 401, 601



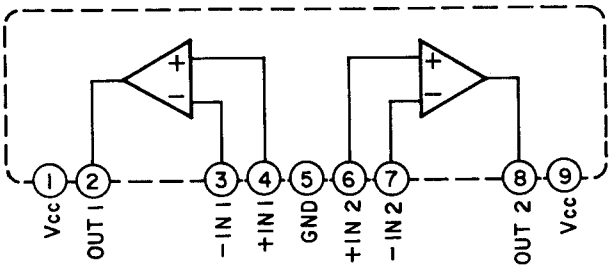

μPC1270H: IC103, 203, 303, 403



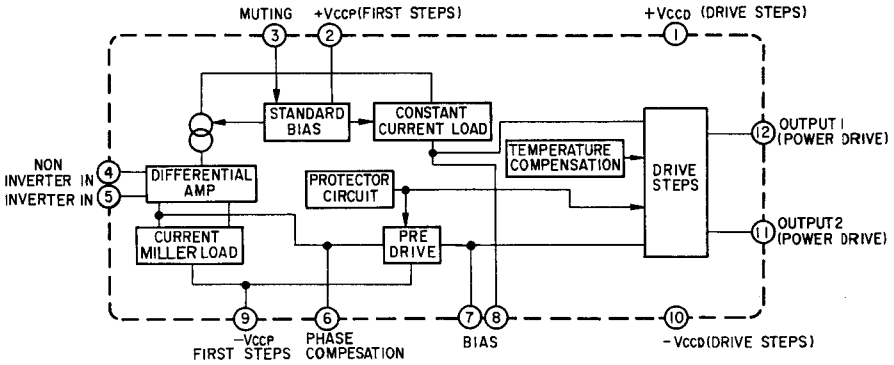

μPC494C: IC501



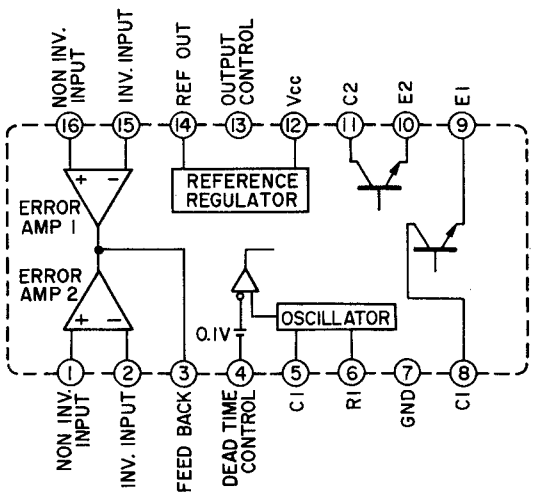

2SC3327: Q101, 201, 301, 401
2SA1115: Q521
2SC2603: Q522

2SC3423: Q102, 202, 302, 402
2SC3421: Q530
2SA1358: Q515, 531



2SC945: Q103, 203, 303, 403
Q503, 504, 518, 520
2SA733: Q104, 204, 304, 404
Q501, 502, 519
2SC3615: Q523
2SC536: Q524

2SC4387: Q105, 205, 305, 405
2SA1672: Q106, 206, 306, 406



2SC4024: Q505, 506



2SD1065: Q507~514



2SB1076M: Q516



RT1N141S: Q517, 525